Ingineria automobilului

SE DISTRIBUIE GRATUIT CA SUPLIMENT AL REVISTEI AUTOTEST

Nr. 50 / martie 2019

Registrul Auto Român

SIAR

Societatea Inginerilor de Automobile din România

romania2019.eu

INGINERIA AUTOMOBILULUI seria nouă a revistei SIAR la a 50-a apariție!

● Analiza uleiului uzat în diagnosticarea funcționării motorului diesel ● Folosirea metodei elementului finit la analiza siguranței pasagerului din dreapta în cazul unei coliziuni laterale ● Procesul de schimb de gaze la motoarele cu ardere internă cu pistoane opuse ● Eficiența regimurilor de funcționare stabilizate, specifice m.a.i. care echipează autovehiculele hibrid ● Calculul numeric al reacțiunilor static nedeterminate ale unui mecanism patrulater plan articulat cu bare drepte

SIAR ESTE MEMBRĂ FISITA INTERNATIONAL FEDERATION OF AUTOMOTIVE ENGINEERING SOCIETIES

EAEC EUROPEAN AUTOMOBILE ENGINEERS COOPERATION

TESTAREA ȘI OMOLOGAREA MOTOARELOR CU ARDERE INTERNĂ

Autori (Authors): **Anghel CHIRU, Stelian ȚÂRULESCU**

Editura (*Published by*): MATRIXROM
Anul apariţiei (*Published*): 2018
ISBN 978-606-25-0425-0

Experiența acumulată în domeniul cercetării și testării motoarelor cu ardere internă pentru automobile în Centrul de cercetări al Universității Transilvania din Brașov în peste 50 de ani, precum și cunoștințele de specialitate rezultate în urma evaluării performanțelor energetice și ecologice ale acestora, cu echipamente, programe și tehnici competitive, au fost sistematizate în această lucrare.
Lucrarea este recomandată studenților, doctoranzilor și cercetătorilor, care sunt preocupați de inovarea și perfecționarea motoarelor termice destinate propulsiei automobilului.
În prima parte a lucrării sunt prezentate celulele moderne de testare, echipamentele din dotare, instalațiile auxiliare care le deservesc și procedurile ce trebuie urmate pentru cercetările experimentale și omologare.
Sunt oferite, cu suficiente detalii, informații privind datele tehnice, parametrii funcționali și constructivi ai instalațiilor și echipamentelor, de ultima generație, destinate măsurării/tratării consumurilor de aer și combustibil și evaluării presiunilor, temperaturilor și bilanțului energetic. O atenție deosebită este acordată mijloacelor utilizate pentru vizualizarea și înregistrarea proceselor de combustie, programelor folosite pentru prelucrarea și interpretarea datelor experimentale și evaluarea performanțelor energetice ale motoarelor cu ardere internă. Trei capitole sunt dedicate procedurilor specifice aplicate pentru determinarea parametrilor efectivi și calibrarea motoarelor, precum și standardelor și normelor UE și SAE destinate omologării acestora.

MANAGEMENT ȘI AUDIT ÎN SIGURANȚA TRAFICULUI RUTIER

Autori (Authors): **Vasile Petru ONCEANU, Sergiu Grigore ARMAȘU**

Editura (*Published by*): UASM
Anul apariției (*Published*): 2011
ISBN 978-9975-45-175-8

Lucrarea este destinată studenților din Universitatea Agrară de Stat din Moldova și are ca obiectiv prezentarea elementelor de bază privind asigurarea securității rutiere.
Cumulând competențe și experiențe din mediul academic și din instituții cu atribuții în domeniu, lucrarea constituie un ghid util specialiștilor din domeniul securității rutiere.
Lucrarea este structurată pe 4 capitole, cu 7 anexe și o bibliografie selectivă, astfel:

1. Conceptul de bază privind managementul și auditul în siguranța rutieră
2. Conceptul privind siguranța traficului rutier și probleme fundamentale ale acestuia
3. Structura, principii de organizare a sistemului și tehnologia managementului siguranței traficului rutier
4. Auditul în siguranța traficului rutier ca metodă de control a calității infrastructurii traficului rutier

Prezentând studii de caz și sinteze privind securitatea rutieră la nivel global, lucrarea constituie un ghid util specialiștilor din Republica Moldova ce profesează în domeniul siguranței traficului rutier.

Lucrările prezentate fac parte din fondul bibliografic al Centrului de documentare al SIAR.

UN MOMENT CRUCIAL PENTRU AUTOMOBIL ŞI PENTRU ŞTIINŢELE INGINEREŞTI

A CRUCIAL MOMENT FOR THE AUTOMOBILE AND ENGINEERING SCIENCES

Lumea automobilistică a ajuns, într-adevăr, într-un moment crucial, pe care noi, ca ingineri sau viitori ingineri de automobile, trebuie să-l analizăm și să-l înțelegem cât mai profund cu putință, pentru a recunoaște adevăratele drumuri pe care va trebui să ținem pasul cu cei puternici. În joc nu este numai Diesel contra electrificării totale, ci și orientarea viitoare a învățământului superior în domeniu, formația de inginer mecanic contra celei IT, cu baze eminamente electrice.

În anul 2018 au fost înscrise în circulație, la nivel global, 85 de milioane de automobile. Cu toată euforia pentru electrificarea propulsiei din ultimii ani, în 2018 nu au fost vândute decât 1 milion de automobile electrice în China, în cadrul unui program impus de către stat și 356 de mii în SUA, urmată de Norvegia cu 73 de mii și Germania cu 68 de mii. Mult prea puține față de așteptările politicienilor de peste tot. Doamna cancelar Merkel vorbea acum câțiva ani de un million de automobile electrice în Germania în 2020, demarând în acest sens un mare plan de acțiune, cu un buget remarcabil. Șansele de a atinge acest țel până în anul viitor sunt însă infime. Pe de altă parte, șeful concernului Volkswagen declara acum câteva zile că peste 7 ani VW nu va mai produce decât mașini electrice, motoarele cu piston, fie pe benzină sau pe motorină, fiiind scoase complet din program. Un plan extrem de riscant, chiar dacă imensele piețe din China și SUA sunt argumente încurajatoare pentru electrificare.

E adevărat, politicienii lumii, care, în general nu sunt ingineri, merg deocamdată ferm pe acest drum: în Norvegia nu vor mai fi înscrise în circulație automobile cu motoare termice începând din 2025, în China, India, Olanda și Suedia din 2030, în Franța, Marea Britanie și în California din 2040. În Norvegia curentul este generat aproape în totalitate folosind forța apei. Dar în China, India și SUA? Energia electrică este produsă în aceste țări cu preponderență pe bază de cărbune – ceea ce înseamnă că emisia de dioxid de carbon nu este în mașină, ci la uzină, țările respective fiind deja acum campionii mondiali la emisii!

Dar, minune, de câteva zile, motorul Diesel, căruia i se tot declara de câțiva ani încoace obștescul sfârșit, renaște ca un Phoenix, vertiginos și glorios din cenușă, adică din funingine și oxizi de azot. Peste 100 de specialiști în pulmologie, profesori și medici renumiți din Germania au luat, în sfârșit, o poziție fermă și calificată, în cadrul unui memorandum, împotriva aberațiilor referitoare la numărul victimelor emisiilor de oxizi de azot și particule. Până acum nu a fost detectat, pe baze științifice, nici măcar un deces cu o asemenea cauză. Emisia de oxid de azot, și, cu atât mai mult, de particule, a unei țigarete este mai mare cu multe, multe ordine de mărime. Considerând valorile pe baza cărora s-au fixat limitele de emisii care ar dăuna, se zice, sănătății, un fumător ar muri exact în 4 săptămâni!

În schimb, motoarele termice pentru automobile aflate în prezent în faza de dezvoltare au ajuns deja la un randament de 48%, ceea ce duce la o scădere colosală a consumului de combustibil și a emisiilor de dioxid de carbon. Cât despre oxizii de azot, emisiile acestor noi motoare sunt deja mult sub limitele impuse de politicieni. Mai mult, motorul Diesel rămâne cu avantajul net al autonomiei de drum față de propulsia cu motor electric și baterie, timpul și tehnica de încărcare cu energie (combustibil), constituind alte mari avantaje.

Argumentul determinant pentru revenirea spectaculoasă pe piață a motorului Diesel este însă combustibilul însuși: în loc de motorină obținută din țiței vom avea în curând la dispoziție un combustibil produs din resturi de plante și din alte deșeuri, inclusiv din mase plastice. Cu un asemenea combustibil emisia de dioxid de carbon este reciclată în proporție de 90%, iar emisiile de NOx și particule sunt din nou substanțial reduse. Combustibilul minune,denumit CARE, este deja folosit în toate automobilele consiliului de administratie al concernului BOSCH, în Stuttgart, fiind testat și în câteva avioane Airbus ale companiei Lufthansa. Prețul actual al unui litru de CARE, la producția deocamdată modestă în comparație cu cea a combustibililor conventionali, este doar cu 30 de cenți mai mare decât cel al motorinei.

Așa se întoarce roata! Bineînțeles că ajutorul motoarelor electrice la propulsie în variante hybrid sau plug-in este deosebit de eficient, bineînțeles că mașinile pur electrice vor fi de neînlocuit în traficul megametropolelor – doar soluțiile extreme și extremiste nu își vor găsi locul.

Apelez la prețuiții mei colegi din SIAR, respectiv din Universitățile românești, să nu cedeze ispitelor și impunerilor legate de electrificarea totală a automobilelor, transformând direcții de studii, catedre și posturi universitare de la ingineria mecanică, termodinamică și motoare termice la IT și electrotehnică, așa cum se mai întâmplă acum prin vestul Europei și prin America. Știu, nu toți rectorii și senatorii sunt ingineri, cu atât mai puțin politicienii.

Dar noi, împreună, îi putem convinge cu argumente solide!

Prof. univ. dr. ing. Cornel STAN,
Redactor șef

SUMAR „INGINERIA AUTOMOBILULUI“ NR. 50

3 UN MOMENT CRUCIAL PENTRU AUTOMOBIL ŞI PENTRU ŞTIINŢELE INGINEREŞTI
A CRUCIAL MOMENT FOR THE AUTOMOBILE AND ENGINEERING SCIENCES

5 EXPLORĂRI LINGVISTICE ÎN INGINERIA AUTOVEHICULELOR (IV)
A LINGUISTIC JOURNEY IN THE FIELD OF AUTOMOTIVE ENGINEERING (IV)

8 ANALYSE OF USED OIL IN ORDER TO EMIT DIAGNOSIS INTERPRETATIONS OF THE DIESEL ENGINE OPERATION
ANALIZA ULEIULUI UZAT CU SCOPUL EMITERII INTERPRETĂRILOR DE DIAGNOSTICARE A FUNCŢIONĂRII MOTORULUI DIESEL

12 FINITE ELEMENT ANALYSIS OF OCCUPANT SAFETY IN THE CASE OF FAR SIDE IMPACT WITH A RIGID POLE
ANALIZA SIGURANŢEI PASAGERULUI DIN DREAPTA ÎN URMA UNEI COLIZIUNI LATERALE CU UN STÂLP RIGID, FOLOSIND METODA ELEMENTULUI FINIT

15 CONSIDERATIONS ON THE GAS EXCHANGE PROCESS IN INTERNAL COMBUSTION ENGINES WITH OPPOSITE PISTONS
CONSIDERAŢII PRIVIND PROCESUL DE SCHIMB DE GAZE LA MOTOARELE CU ARDERE INTERNĂ CU PISTOANE OPUSE

19 STEADY STATE ENGINE EFFICIENCY SPECIFIC TO SERIES HYBRID ELECTRIC VEHICLES
EFICIENŢA REGIMURILOR DE FUNCŢIONARE STABILIZATE, SPECIFICE MOTOARELOR CU ARDERE INTERNĂ CARE ECHIPEAZĂ AUTOVEHICULELE HIBRID ELECTRICE

23 ALGORITHM AND NUMERICAL CALCULATION OF UNDETERMINED STATIC REACTIONS TO THE PLAN ARTICULATED QUADRILATERAL MECHANISM WITH STRAIGHT BARS
ALGORITM ŞI CALCUL NUMERIC AL REACŢIUNILOR STATIC NEDETERMINATE ALE UNUI MECANISM PATRULATER PLAN ARTICULAT CU BARE DREPTE

26 STUDENTS ACHIEVEMENTS IN POLITEHNICA UNIVERSITY OF TIMIŞOARA
ACTIVITĂŢI STUDENŢEŞTI LA UNIVERSITATEA POLITEHNICA DIN TIMIŞOARA

REGISTRUL AUTO ROMÂN

Director general
George-Adrian DINCĂ
Director tehnic
Cristian Viorel BUCUR
Director economic
Mihaela GHEORGHE
Director dezvoltare
Gabriel Florentin TUDORACHE

Şef Birou Comunicare şi Redacţie Revistă Auto Test
Roxana DIMA

Redactori
Radu BUHĂNIŢĂ
Emilia PETRE
George DRUGESCU
Gabriel MANOLE

Contact:
Calea Griviţei 391 A,
sector 1, cod poştal 010719,
Bucureşti, România
Tel/Fax: 021/202.70.17
E-mail: autotest@rarom.ro
www.rarom.ro
www.autotestmagazin.ro

SIAR

Contact
Facultatea de Transporturi
Universitatea Politehnica
Bucureşti
Splaiul Independenţei 313
Sala JC 005, Cod poştal 060042, sector 6, Bucureşti, România
Tel/Fax: 021/316.96.08
E-mail: siar@siar.ro
www.ingineria-automobilului.ro
www.siar.ro
https://www.facebook.com/SIAR.FISITA/

TIPAR
S.C. SELADO COM S.R.L.
Str. Mioriţei nr. 59, Brăila
Jud. Brăila

Reproducerea integrală sau parţială a textelor şi imaginilor se face numai cu acordul Revistei Auto Test, a Registrului Auto Român.
The authors declare that the material being presented in the papers is original work, and does not contain or include material taken from other copyrighted sources. Wherever such material has been included, it has been clearly indented or/and identified by quotation marks and due and proper acknowledgements given by citing the source at appropriate places. The views expressed in the articles are those of the authors and are not necessarily endorsed by the publisher. While every case has been taken during production, the publisher does not accept any liability for errors that may have occurred.

SOCIETATEA INGINERILOR DE AUTOMOBILE DIN ROMÂNIA

Preşedinte: Conf. dr. ing. habil. **Adrian-Constantin CLENCI**, Universitatea din Piteşti
Preşedinte de onoare: Prof. dr. ing. **Mihail-Eugen NEGRUŞ**, Universitatea Politehnica din Bucureşti
Vicepreşedinte: Prof. dr. ing. **Cristian ANDREESCU**, Universitatea Politehnica din Bucureşti
Vicepreşedinte: Prof. dr. ing. **Nicolae BURNETE**, Universitatea Tehnică din Cluj-Napoca
Vicepreşedinte: Conf. dr. ing. **Victor CEBAN,** Universitatea Tehnică a Moldovei din Chişinău
Vicepreşedinte: Prof. dr. ing. **Anghel CHIRU**, Universitatea „Transilvania" din Braşov
Vicepreşedinte: Conf. dr. ing. **Liviu MIHON,** Universitatea Politehnica din Timişoara
Vicepreşedinte: Prof. dr. ing. **Victor OŢĂT**, Universitatea din Craiova
Vicepreşedinte: Prof. dr. ing. **Ioan TABACU**, Universitatea din Piteşti
Secretar General: Prof. dr. ing. **Minu MITREA**, Academia Tehnică Militară „Ferdinand I" din Bucureşti

COMITETUL ŞTIINŢIFIC

Prof. **Dennis ASSANIS**
University of Michigan, Michigan, United States of America

Prof. **Rodica A. BĂRĂNESCU**
University of Illinois at Chicago College of Engineering, United States of America

Prof. **Nicolae BURNETE**
Universitatea Tehnică din Cluj-Napoca, România

Prof. **Giovanni CIPOLLA**
Politecnico di Torino, Italy

Dr. **Felice E. CORCIONE**
Engines Institute, Naples, Italy

Prof. **Georges DESCOMBES**
Conservatoire National des Arts et Metiers de Paris, France

Prof. **Cedomir DUBOKA**
University of Belgrade Serbia

Prof. **Pedro ESTEBAN**
Institute for Applied Automotive Research Tarragona, Spain

Prof. **Radu GAIGINSCHI**
Universitatea Tehnică „Gh. Asachi" din Iaşi, România

Prof. **Berthold GRÜNWALD**
Technical University of Darmstadt, Germany

Eng. **Eduard GOLOVATAI-SCHMIDT**
Schaeffler AG & Co. KG Herzogenaurach, Germany

Prof. **Mircea OPREAN**
Universitatea Politehnica din Bucureşti, România

Prof. **Nicolae V. ORLANDEA**
Retired Professor, University of Michigan Ann Arbor, M.I., USA

Prof. **Victor OŢĂT**
Universitatea din Craiova, România

Prof. **Pierre PODEVIN**
Conservatoire National des Arts et Metiers de Paris, France

Prof. **Andreas SEELINGER**
Institute of Mining and Metallurgical Machine, Engineering, Aachen, Germany

Prof. **Ulrich SPICHER**
Kalrsuhe University, Karlsruhe, Germany

Prof. **Cornel STAN**
West Saxon University of Zwickau, Germany

Prof. **Dinu TARAZA**
Wayne State University, United States of America

Prof. **Michael BUTSCH**
University of Applied Sciences, Konstanz, Germany

COMITETUL DE ONOARE AL SIAR

AVL România – **Gerolf STROHMEIER**
Magic Engineering SRL – **Benone COSTEA**
Registrul Auto Român – RAR – **George-Adrian DINCĂ**
Renault Technologie Roumanie – **Alexander SIMIONESCU**
Uniunea Naţională a Transportatorilor Rutieri din România – UNTRR – **Radu DINESCU**

COLEGIUL DE REDACŢIE

Editor in Chief
Cornel STAN
West Saxon University of Zwickau, Germany
E-mail: *cornel.stan@fh-zwickau.de*

Technical and Production Editor
Minu MITREA
Military Technical Academy, Bucharest, Romania
E-mail: *minumitrea@yahoo.com*

Reviewers:
Ion TABACU • Florian IVAN • Tiberiu MACARIE • Adrian CLENCI • Viorel NICOLAE • Dinel POPA • Sebastian PÂRLAC • Dinu COVACIU • Adrian ŞOICA • Rodica NICULESCU • Ştefan TABACU • Ionel VIERU • Minu MITREA

Contributors:
Horia BELES
Jan-Cristian GRIGORE
Peter HOFBAUER
Victor IORGA
Cristian-Ioan LEAHU
Minu MITREA
Rodica NICULESCU
Nicolae PANDREA
Dan POP
Sebastian RADU
Cornel STAN
Adrian TUSINEAN
Stelian ŢÂRULESCU
Cătălin ZAHARIA

The articles published in *„Ingineria automobilului"* magazine are indexed by Web of Science in the *„Emerging Source Citation Index (ESCI)"* Section.

Web of Science Clarivate Analytics

Articolele publicate în „Ingineria automobilului" sunt incluse în ***Romanian Journal of Automotive Engineering*** *(ISSN 2457 – 5275) – revista SIAR în limba engleză.*
Revistele SIAR sunt publicate la adresa ***www.ro-jae.ro***

Ingineria automobilului: an apariţie ediţia tipărită 2006 (ISSN 1842 – 4074) / ediţia electronică 2007 (ISSN 2284 – 5690).
Serie nouă a Revistei Inginerilor de Automobile (RIA), tipărită în perioada 1990-2000 (ISSN 1222-5142)
SIAR publică online Romanian Journal of Automotive Engineering ISSN 2457 – 5275

EXPLORĂRI LINGVISTICE ÎN INGINERIA AUTOVEHICULELOR (IV)

A LINGUISTIC JOURNEY IN THE FIELD OF AUTOMOTIVE ENGINEERING (IV)

Conf. dr.
Laura CÎȚU[1]
lauracitu@yahoo.com

Conf. dr.
Adina MATROZI[1]

Lector dr.
Silvia BONCESCU[1]

Dr. Ing.
Ion TELEAGĂ[2]

Prof. dr. ing.
Sebastian PÂRLAC[3]

Conf. dr. ing. habil.
Adrian CLENCI[3]

[1] Universitatea din Pitești, Departamentul de Limbi Străine Aplicate
[2] Renault Technologie Roumanie
[3] Universitatea din Pitești, Departamentul Autovehicule și Transporturi, Str. Târgu din Vale, Nr. 1, Pitești, România

În lumea antică, *arta* definea un concept diferit de accepțiunea pe care termenul o cunoaște astăzi, în fapt nefăcându-se distincție față de conceptul de *tehnică*. Latinescul *ars*, care stă la baza termenului de *artă* însemna „abilitate, meserie, cunoaștere tehnică", termen al cărui corespondent în limba greacă era *tekhnè*, ușor de recunoscut ca etimon al cuvântului actual *tehnică*. În Grecia antică și în civilizația romană, *tekhnè*, respectiv *ars* se refereau la un ansamblu de activități umane supuse anumitor reguli. Semnificația termenului *artă* a evoluat istoric, abia începând cu secolul al XVIII-lea, secolul Luminilor, impunându-se o accepțiune apropiată de cea îndeobște recunoscută astăzi. Aceea în care conceptul de *artă* se bazează pe o percepție a simțurilor, pe noțiunile de *gust* și de *frumos*, fundamentează principiile unor teorii, ale unei discipline denumite *estetică* și pare astfel într-adevăr că se separă riguros de vechiul concept de *tehnică*, cu varianta lui mai curentă – *tehnologie*. Dar această separație *pare* totală, pentru că la nivelul mecanismelor profunde de percepție umană există o zonă comună între artă și tehnologie, care nu este întotdeauna evidentă la primul nivel al cunoașterii comune. Despre o astfel de întrepătrundere inedită va fi vorba în explorarea termenului căruia îi este consacrată rubrica din acest număr.

Există în industria automobilelor un concept tehnic de o complexitate aparte, întrucât mobilizează, pe lângă datele științifice, obiective specifice domeniului tehnologiei, un ansamblu de operații, informații și procese de largă subiectivitate. Este vorba despre conceptul redat prin

Cameră semianecoică (sursa: Renault Technologie Roumanie)

termenul englezesc *harshness*, vehiculat ca atare în mai multe limbi de circulație, care cunoaște în unele dintre ele și corespondente autohtone – franceza, germana –, în altele mai puțin – româna –, al cărui specific ne-am propus să-l examinăm atât din punctul de vedere al constructorului de automobile, cât și din cel al controversei și variației lingvistice.

Sigla NVH – *noise*, *vibration* and *harshness* – corespunde domeniului în care se studiază evoluția zgomotelor (*noise*) și a vibrațiilor (*vibrations*) care apar în utilizarea vehiculelor, precum și evaluarea/ cuantificarea confortului acustic (*harshness*) al factorului uman. Urechea umană percepe zgomote în plaja de frecvențe 20Hz - 20KHz. Această plajă de audibilitate variază în funcție de sensibilitatea, vârsta și starea de sănătate a indivizilor. Așadar, deși confortul acustic – *harshness* – poate fi calculat sau măsurat fizic, el este evaluat subiectiv de indivizi. Mai mult decât atât, această evaluare depinde mult de vehiculul care este evaluat și implicit de costul lui. Asteptările clienților în ceea ce privește confortul acustic diferă mult pentru același tip de zgomot, și nu neapărat în sensul diminuării nivelului acestuia. În acest sens, putem lua ca exemplu sintagma *booming noise* (engl.) sau *bourdonnement* (fr.) care se traduce literal în limba româna cu/prin 'zgomot de bondar' (zumzăitul bondarului). Acest zgomot cu o frecvență între 20Hz-200Hz, corespunzând armonicii a 2-a a motorului (pentru motoarele în 4 cilindri), este foarte iritant pentru pasagerii vehiculelor (dacă este ascultat o perioadă mai lungă de timp), dar este perceput/ evaluat pozitiv de clienții mașinilor sport sau de curse, ei căutând acest timbru aparte al motorului, care face diferența față de alte vehicule clasice.

În industrie, noțiunea de *harshness* este mai puțin utilizată ca atare în mod direct, în schimb se utilizează subdomenii ale acesteia, ca de exemplu *rattles and squeaks* ('troncănit' și 'scârțâit'), provenind de la funcționarea diferitelor sisteme, zgomote de caroserie sau planșa de bord (denumite popular *cri-cri*, prin asociere cu 'greieraș'), ajungându-se până la listarea și evaluarea subiectiv exhaustivă a fiecărui zgomot în parte. La nivelul Grupului Renault au fost identificate în cadrul ingineriei aproape 100 de zgomote relativ la utilizarea vehiculului. Toate aceste zgomote sunt controlate în etapa de cadraj și validare produs prin caiete de sarcini specifice. Totuși, în etapa de certificare produs, un juriu este ales pentru a evalua subiectiv confortul acustic în funcție de poziționarea produsului pe piață, a evoluției pieței (*market trend*) și a clientului produsului respectiv. Această evaluare subiectivă a confortului acustic, coroborată cu măsurători precise ale zgomotelor și vibrațiilor, este cea mai bună estimare a confortului acustic perceput de client în acest moment pe piață. Ca element de noutate, putem adăuga că în Europa, vehiculele sunt reglementate din punct de vedere acustic prin norma de zgomot exterior UN/ECE R51.03 2014 care stabilește limita zgomotului emis de autoturisme la 72 dB (A); în plus, se precizează și că această limită va coborî la 70 dB (A) în 2020. Acestea nu garantează însă pasagerilor un confort acustic interior. Totuși, există țări în care este reglementată și limita maximă a zgomotului interior, ca de exemplu Rusia.

Așadar, *harshness*-ul, adică un soi de „duritate" a zgomotelor și vibrațiilor exprimă, în fapt, caracterul subiectiv al perceperii acestor zgomote și vibrații. Sintagma *Zgomotul, vibrațiile* **și** *asprimea* (**NVH**) se referă la studiul și modificarea caracteristicilor de zgomot și vibrații ale vehiculelor, în special ale autoturismelor și camioanelor. În timp ce zgomotul și vibrațiile pot fi ușor măsurate, 'asprimea' sau *duritatea* este o calitate subiectivă și este măsurată fie prin evaluări ale juriului mai sus amintit, fie prin instrumente analitice care pot oferi anumite rezultate în care se reflectă impresiile umane subiective. Aceste instrumente aparțin domeniului cunoscut sub numele de psihoacustică. NVH-ul interior se ocupă de zgomotul și vibrațiile cu care se confruntă ocupanții habitaclului, în timp ce NVH-ul exterior are ca obiect zgomotul radiat de vehicul și include măsurarea zgomotului în condiții de rulare. NVH este în cea mai mare parte inginerie, însă măsurătorile obiective nu reușesc să prezică sau să se coreleze complet cu impresia subiectivă asupra observatorilor umani. De exemplu, deși răspunsul urechii la niveluri moderate de zgomot este aproximat de ponderarea A , două zgomote diferite cu același nivel de ponderare A nu sunt neapărat la fel de deranjante. Domeniul psihoacustic este parțial preocupat de această corelație. În unele cazuri, inginerului NVH i se solicită să schimbe calitatea sunetului, adăugând sau scăzând armonicile particulare, mai degrabă decât făcând vehiculul mai silențios.

În ceea ce privește „aventura" lingvistică a acestui concept, este de precizat că termenul englezesc *harshness* este funcțional în domeniul muzicii, de unde ingineria l-a și împrumutat și l-a păstrat aproape cu aceeași configurație semantică de bază, căreia i s-au adăugat seme[1] specifice din domeniul ingineriei autovehiculelor, așa cum am descris mai sus. În muzică, *harshness* desemnează în limba engleză unul dintre descriptorii audio non-contextuali care reprezintă o dimensiune a trăsăturii psihoacustice multidimensionale denumită *timbru muzical*. Descriptorul denumit *harshness* devine evident în momentul în care sunt comparate două instrumente care produc o singură tonalitate, o singură notă muzicală (de exemplu, diferența de *harshness* dintre un flaut si un saxofon). *Harshness* apare des în discuțiile privind tehnologia digitală (în opoziție cu cea analogă) și se referă la un sunet care este obositor sau are o calitate oarecum neplăcută. Tehnologia analogă, prezentă la magnetofoane și în utilizarea transformatoarelor poate ajuta la modelarea intervalului de frecvență descris de obicei ca fiind ***harsh*** (aspru, strident, deranjant). Într-o înregistrare video care cuprinde un glosar de termeni privind frecvența audio, destinat celor care mixează muzica, *harsh* este încadrat în intervalul 2-10 KHz. Termenul se folosește în special pentru proprietatea asociată instrumentelor, în timp ce pentru voce se folosește *sibilant* (strident).

Importul termenului *harshness* din muzică în ingineria automobilelor nu s-a asociat în mod necesar cu definiții riguroase ale sensului tehnic al acestuia. Termenul apare, de exemplu, în *Collins Dictionary*, care îl

1. În semantică, *semul* este unitatea minimală de sens, care nu poate fi realizată autonom, ci doar în cadrul unui *semem*, prin care putem înțelege, *grosso modo*, un cuvânt. Sensul unui cuvânt nu este deci o unitate indivizibilă, ci o sumă de *seme*, respectiv de "atomi" de sens. De exemplu, sememul *bărbat* este format din semele '+animat' (care se opune lui -'animat', sem care caracterizează lucrurile și nu ființele), '+uman' (și nu '+animal'), '+mascul' (care se opune lui '+ femelă') etc.

înregistrează ca făcând parte din abrevierea NVH, fără sa îl reia însă și să îl explice în definiție. Apare definit într-un articol din *SAE Transactions* din 1939 („trepidație bruscă/ șoc, opuse senzației care poate fi descrisă drept lentă și plăcută/ lină; trepidația are, prin natura ei, o frecvență ridicată din punctul de vedere al vibrației mecanice și se apropie de nivelul audibil").

Definirea termenului pare așadar destul de problematică pentru specialiști, din cauza faptului că *harshness* este greu de cuantificat, reprezentând combinația dintre *noise* și *vibrations* ('zgomot și vibrații'), care pot fi ușor măsurate, dar la care se adaugă și elementul greu măsurabil, respectiv percepția subiectivă a ocupanților vehiculului. Poziții mai recente militează pentru eliminarea lui *harshness* și înlocuirea abrevierii NVH cu N&V, asa cum au procedat deja câteva companii producătoare mari[2]. Alteori, acolo unde se menține NVH, apare ca echivalent pentru H termenul *brutality*.[3]

În limba română, situația lingvistică este similară celei din limba engleză. Fie este folosită abrevierea NVH, fără explicații specifice privind termenul *harshness,* fie sunt folosite ca echivalente *rigiditate* sau *duritate* – acesta fiind cel mai frecvent utilizat –, ceea ce corespunde lui *brutality* din limba engleză. Și în limba franceză, atunci când se dorește desprinderea din abrevierea NVH și transpunerea autohtonă a lui *harshness*, se apelează la termenul *rudesse*, fidelă reproducere a englezescului *brutality*. Aceeași cutumă există și în limba germană, unde pentru *brutality* din engleză, *duritate* din română și *rudesse* din franceză, este utilizat termenul *Rauheit* (sau *Rauigkeit*), care acoperă aceleași definiții și utilizări generale în limbă, în muzică și în științe pe care le au și ceilalți trei termeni în limbile de origine.

Având în vedere că obiectivul principal al rubricii de față este examinarea posibilităților de echivalare în limba română a unor termeni de proveniență străină din domeniul ingineriei autovehiculelor, întrebarea care se ridică la sfârșitul acestei descrieri este *Ce termen românesc ar putea fi îndeobște folosit pentru englezescul 'harshness'?* În fiecare număr al revistei, concluzia a condus către o anumită formă. *Explorările* din acest număr par mai degrabă să conducă la concluzia că efortul de abandon al lui *harshness* în discursul în limba română, în favoarea unei forme neaoșe, nu este neapărat cea mai fericită opțiune. *Duritate, asprime, disconfort acustic* etc. nu sunt în mod evident posibilități consistente de echivalență terminologică în limba română (ci doar componente de explicații), întrucât, pe de o parte, acești termeni au o prea mare polivalență în limbă – ceea ce le reduce substanțial șansa de a deveni termeni tehnici în industria automobilului –, iar pe de alta, este greu de presupus că se va renunța totodată și la abrevierea NVH, unde englezismul rămâne evocat în litera H. Așadar, opțiunea lingvistică realistă este acceptarea lui *harshness* – cuvânt ușor inconfortabil pentru tiparul limbii române, dar în mod cert securizant pentru terminologia automobilului. Decât să fie create ambiguități neproductive în manipularea unui concept care sună plăcut în comunicare, este preferabil să se recurgă la o formă lingvistică cu sens univoc. Întrucât, așa cum spunea scriitorul francez Albert Camus – *Mal nommer les choses c'est ajouter au malheur du monde*[4].

ALTE SURSE BIBLIOGRAFICE ȘI DE CORPUS:

https://www.collinsdictionary.com/dictionary/english/nvh
https://www.jstor.org/stable/44467912?seq=1#page_scan_tab_contents
https://www.jstor.org/stable/44467912
https://www.carsguide.com.au/car-advice/what-is-nvh-36403
https://en.wikipedia.org/wiki/Noise,_vibration,_and_harshness
https://automobileengineering.enggconferences.com/events-list/noise-vibration-and-harshness-control
https://books.google.ro/books?id=ANfdCgAAQBAJ&pg=PA1937&lpg=PA1937&dq=harshness+automobile+engineering&source=bl&ots=gzunFaWlRk&sig=ACfU3U3f_EdmvxEqBpkkMv_YgcChQCHn-w&hl=en&sa=X&ved=2ahUKEwi024jfwIvgAhWN16QKHdlnA7M4ChDoATAHegQIAhAB#v=onepage&q=harshness%20automobile%20engineering&f=false
http://www.sandv.com/downloads/1304goet.pdf
https://www.lexilogos.com/francais_dictionnaire.htm
https://www.bksv.com/fr-FR/Applications/vehicle-noise-vibration-and-harshness-development
https://www.ziaruldeiasi.ro/ghidul-auto/mazda-a-modificat-cx-7-pentru-a-corespunde-cerintelor-europene~ni4cvo
https://www.capital.ro/download?id=158336
https://www.amsonline.ro/test-comparativ-sisteme-electronice-de-stabilitate/
https://www.autoexpert.ro/mercedes-benz-eqc-intra-in-ultima-serie-de-teste-inainte-de-productie/
https://www.bzi.ro/interior-nou-si-motorizari-perfectionate-pentru-toyota-avensis-239883
http://www.automarket.ro/stiri/article_print.php?article_id=41583
https://www.picoauto.com/download/documents/manuals/MM080.de_Eradicate_NVH.pdf
Andreas Kind and Andreas Rohde, "The Harshness of Air Springs in Passenger Cars, in *Encyclopedia of Automotive Engineering*", David Crolla (ed.), Wiley, 2015
Dicționar German-Român, Academia Română, 2007
Negative Semiologie der Stimme. Reflexionen über die Stimme als Medium der Sprache (2003), Sybille Krämer

2. V. Greg Goetchius in *SOUND & VIBRATION*/APRIL 2013 - http://www.sandv.com/downloads/1304goet.pdf
3. https://automobile.expertconferences.org/events-list/noise-vibration-and-harshness-nvh-in-automobiles
4. *Să denumești greșit lucrurile înseamnă să contribui la nefericirea lumii.*

ANALYSE OF USED OIL IN ORDER TO EMIT DIAGNOSIS INTERPRETATIONS OF THE DIESEL ENGINE OPERATION

ANALIZA ULEIULUI UZAT CU SCOPUL EMITERII INTERPRETĂRILOR DE DIAGNOSTICARE A FUNCȚIONĂRII MOTORULUI DIESEL

REZUMAT

O funcționare defectuoasă a motorului poate fi rezultatul utilizării necorespunzătoare a combustibililor și lubrifianților, ceea ce poate conduce la scăderea caracteristicilor de lubrifiere și a protecției uleiului. Revizia tehnică a unui motor este o activitate importantă care nu poate fi amânată și este considerată obligatorie în perioada de garanție și mai ales post-garanție. De asemenea, pot fi luați în discuție factori ce țin de natura și gradul de uzură a lubrifiantului motorului care ar putea ajuta la determinarea posibilelor disfuncționalități ale acestuia, cum ar fi: cameră de ardere cu defecțiuni cauzate de neetanșeități, combustibil incomplet ars, grosime necorespunzătoare a peliculei de ulei, etc. În această lucrare, autorii prezintă eventualii contaminanți, determinând conținutul de Fe, Cu, Zn și apă ai uleiului uzat. De asemenea, sunt determinate caracteristicile fizice ale uleiului uzat: punctul de inflamabilitate, vâscozitatea cinematică și densitatea. Rezultatele obținute servesc la emiterea unor interpretări de diagnosticare a funcționării motorului diesel de locomotivă.

Key-Words: *lubricants, used oil, diesel engine, diagnosis interpretation, tests, dilution, flash point, water content*

S.I. dr. ing.
Cătălin ZAHARIA
catalin.zaharia@upit.ro

S.I. dr. ing.
Rodica NICULESCU

Conf. dr. ing. habil.
Adrian CLENCI
dan.moldovanu@auto.utcluj.ro

C.S. III
Victor IORGA

Universitatea din Pitești, Str. Târgu din Vale, Nr. 1, 110032, Pitești, Romania

1. INTRODUCTION

A fair comment could be the next one: if it is not damaged, then it is not appropriate to intervene, but if a system does not work optimally then it must be repaired. In this particular moment, the diagnostic skills are entering the scene. It is compulsory to realize that a process is functioning with faults, by using the fact of understanding the system and then by applying knowledge with diagnostic skills, to be able to find out what's working abnormal. A key control model can be composed of six investigation steps of faults (figure 1).

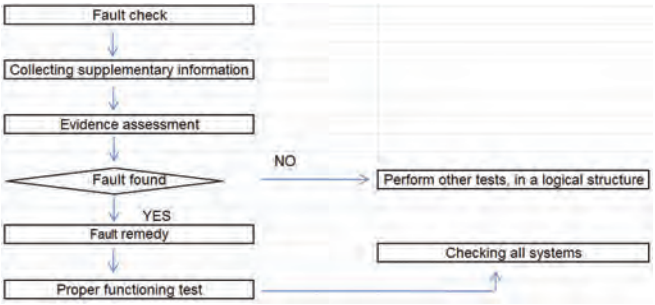

Fig. 1. Faults investigation process

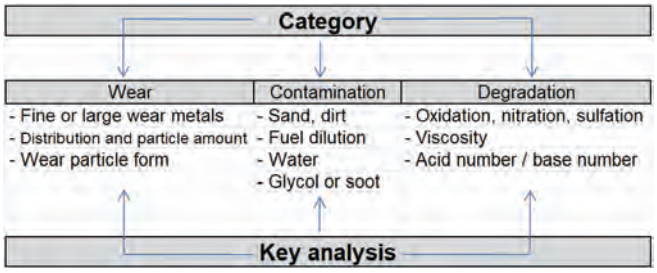

Fig. 2. Oil analysis parameters

Identifying the malfunction that appears when complex systems aren't functioning in parameters is kind of easy to do, if there is a certain amount of training. This involves the next steps: knowledge of the system where the fault appears, having the ability to compose and use of a diagnostic flowchart, determine their conditions of appearance: what the user (system) finds, identifying the malfunction or error that induced the symptom.

There is well known the fact that a lot of diesel engines have prematurely malfunctions caused by soot, water, glycol and diesel in engine lubricant. Each of contaminants is capable of producing premature damaging, sometimes unexpected, of the diesel engine. Problems become even more pronounced when there can be found combinations of contaminants, such as large soot loading oil and glycol, or dilution with diesel.

2. RESEARCH METHODOLOGY

A good lubricant analysis schema is composed by tests like Ferrography, or Scanning Electron Microscopy with Energy Dispersive X-Ray Analysis (SEM/EDX). The disadvantage is that both are time consuming and

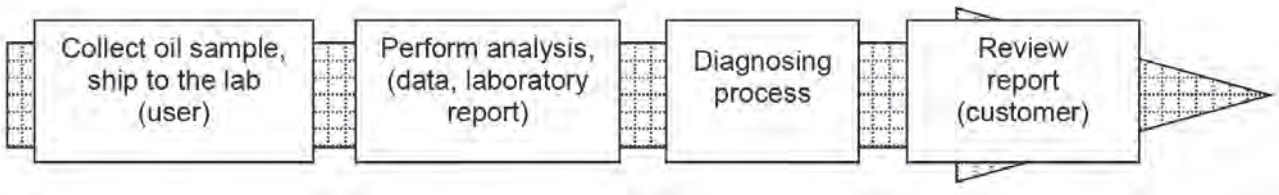

Fig. 3. Off-site oil analysis scheme, [1]

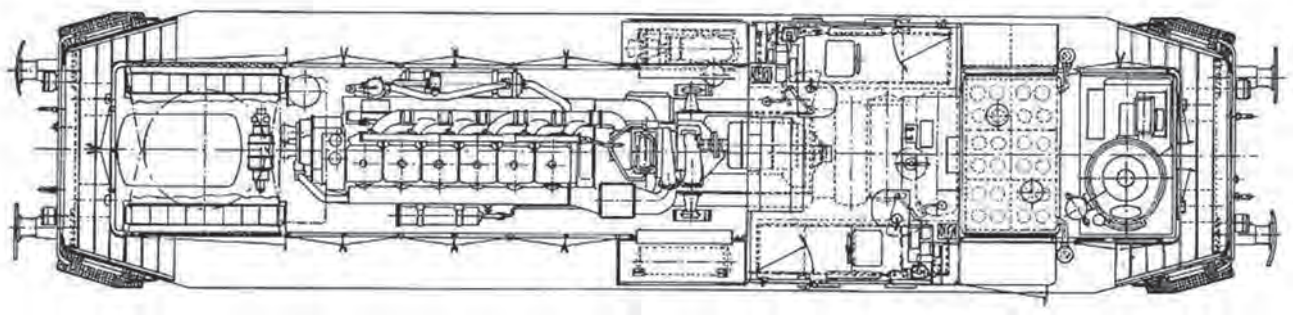

Fig. 4. Diesel hydraulic locomotive

involves higher costs. The mentioned tests offer reliable information concerning the system wear, such as the composition of the wear particles, the emitting source and the degree of severity. Figure 2 shows typical oil analysis parameters by category and key analysis, in order to monitor machine wear, contamination and degradation, [1].

Predictability in maintenance processes is a key factor and this requires real-time information and rapid feedback so reliability engineers can do maintenance practices on the spot. The actual state of the art in oil analysis instrumentation technologies also makes it possible and the result is performing on-site oil analysis saving years of training and testing or strong knowledge of oil chemistry. The methodology consists in 3 steps (figure 3).

1. the first step: the methodology of collecting oil samples is important for obtaining good results for the diagnosing process; it is compulsory that the oil sample is collected while the diesel engine is functioning, not immediately, leaving to flow 2- 3 liters. The oil sample contains only 1 liter of oil, [4].
2. the second step is used oil analyze by specific equipments: flash point, dilution with diesel fuel, kinematic viscosity @ 40^{0}C, density, water content;
3. the third step involves diagnosing process.

The case study is a middle rail mean of transport is produced in Romania and synthesizes some worldwide achievements in the construction of this type of locomotive. This locomotive is designed to handle heavy supply of services for passengers and freight hauling on secondary lines. The diesel hydraulic locomotive is powered by a diesel engine with 6 cylinders, four-strokes, Sulzer type LDA 28 B, working with direct injection, turbocharged with a turbo 250 VTR, 1250 HP, (figure 4), [2].

In the case of DHLe, in service oil analysis require the determination of oil change period of time and identifying the operational faults. The daily check of the oil or every two day in terms of diluting and water content is an important process because that prevents negative influences of the factors listed above. Aging and oil soiling are tracked monthly by performing oil analysis in a laboratory on samples taken from the diesel engine, [3].

For a diesel engine operation, even the best oil is submitted to the process of aging and soiling. For that reason the entire amount of oil must be replaced with new oil. In our example, the oil change is programmed to be done at the end of 36 months or maximum 150000 km. Oil change must be replaced faster in case the data obtained during regular analyzes reached values with allowable limits [8], such as presented in table 1.

For the 6 LDA 28 B diesel engine is absolutely necessary to be used high-performance oils (75 – 80%) with additives antioxidants, anti-corrosion, anti-wear, alkaline detergent, dispersant and anti-foaming (15 – 25%), [3]. A key parameter in determining the condition of used oil or specification of new oil is viscosity measurements by oil analysis laboratories. Thus, increase/decrease in viscosity of used oils could be a sign of oil degradation or oil dilution.

In paper [10] the authors presented the equipment used for tests. This is an automatic system which operates with glass capillary viscometers in order to determine the kinematic viscosity of Newtonian fluids. The equipment can be used for fresh and used mineral and synthetic oils and for any fluid but taking into account the viscosity range of the instrument. Standard Test Method for Kinematic Viscosity of Transparent and Opaque Liquids D 445 is under the jurisdiction of ASTM Committee D-2 on Petroleum Products and Lubricants. This test method specifies a procedure for the determination of the kinematic viscosity of liquid petroleum products, both transparent and opaque, by measuring the time for a volume of liquid to flow under gravity through a calibrated glass capillary viscometer. The time is measured for a fixed volume of liquid to flow under gravity through the capillary of a calibrated viscometer under a reproducible driving head and at a closely controlled and known temperature. The kinematic viscosity is the product of the measured flow time and the calibration constant of the viscometer, [5].

Flash point results can trace the presence of highly volatile and flammable material in a relatively non volatile or non flammable material; a good example is the presence of certain quantities of diesel fuel or gasoline in lubricating oils, [6]. The authors used Eraflash apparatus, made by

Table 1. Admissible value for oil properties.

Property	Admissible limit
Neutralizing number	2 mg KOH/g
Oil dilution (fuel contamination)	6 %
Flash point	180 0C
Water content	0.2 %

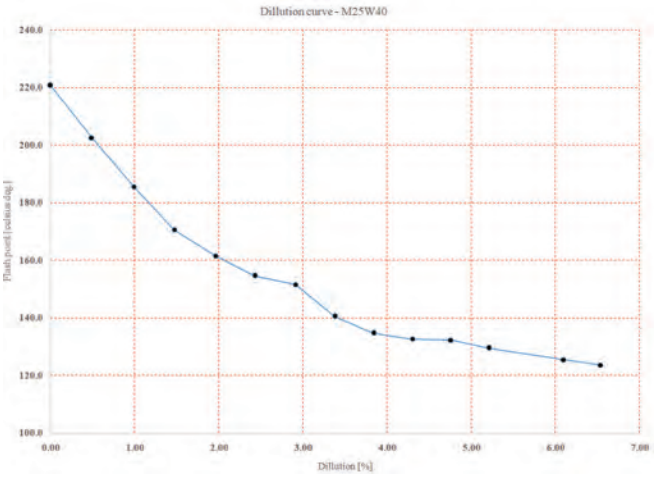

Fig. 5. Dilution curve

Eralytics, Austria in order to find the dilution degree and the oil flash point, [10]. The concerned measurement is conducted under the latest and safest standards ASTM D6450 & D7094 and it is baesd on the Continuous Closed Cup method in order to find the Flash Point. It can be mentioned that this standard method is an versatile flash point method and it is appropriate for accurate flash point tests and also, to find the influence to the flash point of highly flammable fractions in samples like gasoline in diesel or diesel in oil or gas in oil.

An important characteristic of petroleum fluids being part of product specifications is density. Materials are usually commercialized on knowing the density or if on volume basis then converted to mass basis via density tests. The frequency oscillator is the work principle of the Density Meters DS7800 and allows finding density or relative density of crude oils with high vapour pressures in order to prevent vapour loss during transfer of the sample to the density analyzer. The principle of measurement it's based on the use of a small volume of liquid sample which is entered into an oscillating sample tube and the change process in oscillating frequency induced by the change in the mass of the tube is used in conjunction with calibration data to determine the density of the sample, [7].

Water contamination conducts to emulsifying oil and creates an improper capacity of lubricating. The viscosity of the oil is increased and oil additives may be separated. This process leads to a higher reduction of oil lubricating capacity. Analytically the methods can be grouped as by distillation or by Karl Fischer titrations. Generally, trace amounts of water must be determined by Coulometric Karl Fischer methods. Combining the Coulometric technique with Karl Fischer titration, Aquamax KF titrators determined the water content of the sample by measuring the amount of electrolysis current necessary to produce the required iodine, [10].

The well known oil stain method is based on oil analysis on filter paper which enables assessment of capacity detergent - dispersant, the degree of contamination of the oil with carbon particles and chemical degradation by oxidation engine oil increasing.

The determination of debris in used lubricating oils is a key diagnostic method practiced in machine condition monitoring programs. The presence or increase in concentration of specific wear metals can be indicative of the early stages of wear.

3. RESULTS

M25W40 is the type of oil used in our case study. The test consisted in dilution determination and for that was realized the dilution curve (figure 5).

The other results obtained are shown in table 2.

Taking into account solid contamination degree it is clear that high density growth is a normal process. As expected, the dilution with diesel fuel caused the decrease of kinematic viscosity and flash point, (table 2).

Glycol is present in diesel engine oils if there are faulty seals, damaged head gaskets, cracked cylinder or corrosion. In the case study of diesel hydraulic locomotive, the subject of this paper, glycol contamination is removed from the discussion, taking into account that the engine cooling system uses only water, as a cooling technical fluid.

Water contamination by small amounts is normal for engine oils. High water levels are a sign of attention and rarely can be corrected only by changing the engine oil. Long idling in wintertime it's a inappropriate operating engine mode and can induce water condensation in the oil sump, leading to corrosion of the surfaces, the oil oxidation, etc.

A drop in the flash point normally indicates contamination of the lubricant by distillate fuel, although with residual fuel no significant change may be apparent. For guidance, it is advisable to check for fuel leakages when the flash point drops by 30°C or more. A reduced Flash Point normally indicates that there is a fuel leakage into the lubrication system. A more precise test method for measuring fuel contamination in distillate fueled engine oil, which is commonly utilized in used oil analysis laboratories, is gas chromatography, [12].

Fuel dilution, in operating conditions at low temperatures, can cause paraffin deposits. This may conduct, when starting the engine, at low oil pressure and no lubrication. This dramatically reduces the oil film thickness and results in premature wear of the combustion zone (piston,

Table 2. M25W40 oil - test results

	Used oil, [10]	Fresh oil, [10]	Admissible limit, [11]
Flash point [0C]	184.10	220.70	180
Kinematic viscosity@ 400C [cSt]	95.44	113.60	+/-25%
Dilution [%]	0.90	0	5
Density [g/cm3]	1.48	0.89	-
Water content [%]	0.26	0	0.20

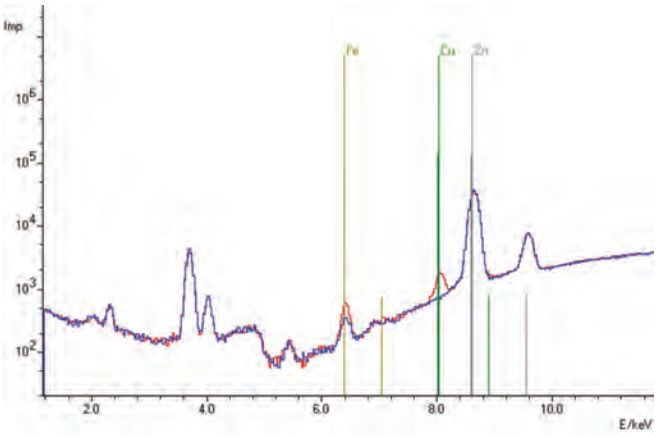

Fig. 6. Amount of Fe, Cu and Zn in the used oil sample

piston rings and cylinder) and crankcase bearing wear. Severe dilution (over 2 %) is associated with leaks, fuel injector problems and low efficiency combustion. Fuel dilution may cause decrease in the viscosity of engine oil, for example, from 15W40 to 5W20.

The author compared the results of conducted tests with the limits values (table 1). Thus, the conclusions are:

- concerning flash point, the obtained value of 184,1^{0}C it is very close to the limit value of 180^{0}C; for that reason it can be imposed the oil changing in order to eliminate explosion risk; the risk of explosion is bigger when high flash points are measured; the crankcase explosion appears when there are noticed a presence of a flammable vapor atmosphere and a heat source; the heat source can be a piston malfunctioning or a running bearing;
- 0,9% is the obtained value in terms of fuel dilution and is not to high, comparing this value with 6% which is the maximum value according to specific literature (table 1); in order to find the fault responsible for the appearance of fuel dilution, it seems that are sealing problems at the level of injection pump,
- the qualitative analysis EDXRF (Energy dispersive X-ray fluorescence) of under study oil samples is shown in the below spectra. The acquisition conditions were the following: direct excitation in the atmosphere of He, slot 1 mm, working voltage U = 44.70 kV, current intensity I = 0.30 mA, acquisition time 180 s, number of energy channels used 2048 (figure 6).
- in terms of density values there can be found a raise from 0.89 to 1.485 g/cm^3; the cause of this density variation is the presence of metal wear and contaminants; in internal combustion engines, iron can have like source the cylinders liners, rings, crankshaft, camshaft, oil pump gear; also, the fluorescence spectra indicates the presence of Cu, as well as a Fe in the used oil sample; this amount of Cu and Fe may the result of wear of bearings (rod, turbo, etc.), piston rings, cylinder liners, cams, tappets or dust presence,
- the source for zinc can be anti-wear additive, but it's not the case here because the additives from the used oil are not yet transformed in contaminants; also, the presence of Zn can be an indicator that the analyzed oil has been mixed of contaminated by another type of oil grade or brand,
- the obtained value of water content is higher than the limit and for this reason the used oil must be changed immediately; here the authors proposed a diagnosis process in terms of sealing matters of cooling system,
- a improper combustion process could be the cause for the blackening of oil stain; like recommendation, the calibration must be done.

4. CONCLUSIONS AND FUTURE WORKS

Test results conducted in this case study are presented below:

- first of all, making used oil analysis is important because the results assesses the condition of the oil and provides recommendations on its suitability for future utilization and optimization of the oil change intervals,
- the conducted study develops the state of the engine and enables the detection and thus prevention of issues which left unattended may impact the reliable operation of the engine. The cumulative effect of oil contamination on engine reliability, fuel economy, emissions in exhaust gases and the maintenance cost are significant. These days, it doesn't exists any motor oil additives that can control the damages produced by these contaminants, therefore, the processes of diagnostics, predictive maintenance and oil analysis are the main strategies to counteract the effects of these contaminants. The advantage of this type of approach is that an off-site research laboratory will create a complete set of oil analysis instruments to run the tests and researchers to review the data. The response time is faster and the up-front capital investment is relatively low. Thus, the purpose of this study was to the find the possible malfunctions on the operation of a diesel engine locomotive and to identify their causes; this approach it's based on analyse of the oil used contaminants.

For future works the authors will try to develop a detailed methodology for engine diagnosing by used oil analysing, by taking into account of more physico - chemical characteristics oil.

Also, for the future, the research will help to elaborate specific set of procedures usable for any type of internal combustion engine.

REFERENCES:

[1] Henning P, Walsh D, Yurko R, Barraclough T, Shi A, Yuegang Z, *Oil analysis handbook for predictive equipment maintenance,* Spectro Scientific, 2014

[2] Cheșa A, *Locomotiva diesel hidraulică de 1250 CP întreținere și exploatare,* Editura ASAB, București, 2001,

[3] Kai Juoperi, *Lubricating oil quality–safe power plant operation depends on it, Energy News, Issue 14,* pp 12–15, 2012

[4] Jensen C. C., *Clean Oil Guide, The importance of oil maintenance,* Tryc Team, Svendborg, Denmark, ver. 007, 2015

[5] An American National Standard 2000 Designation D: D 445 – 97, *Standard test method for kinematic viscosity of transparent and opaque liquids - The calculation of dynamic viscosity,* British Standard, pp 71, 1990

[6] Hochschule Anhalt J W, Magdeburg H K and Rheinfelden J H., *Theory and Praxis of Capillary Viscometry,* Dieter Wagner Schott – Gerate Gmbh, 2018

[7] Kishore R A., *Guide to ASTM Test Methods for the Analysis of Petroleum Products and Lubricants,* Second Edition, ASTM Stock No. MNL 44-2nd, 2007

[8] Gheorghisor M, *Carburanti si lubrifianti pentru autovehicule,* Editura Tiparg, 2012

[9] AJ von Wielligh, *Diesel injector failures and the consequences – caused by fuel quality – case studies,* International Conference of the South African Institute of Tribology, 2004

[10] Zaharia C. V., Niculescu R., Iorga V., Ducu C., Clenci A., Aron B., *Diagnosing the operation of a automotive diesel engine based on the analysis of used oil in the period between of two technical revisions,* The International Congress of Automotive and Transport Engineering, Brasov, Romania, 2016

[11] Ordinul nr. 363/2008 privind aprobarea *Normei tehnice feroviare,* Ministerul transporturilor, 2008

[12] Recommendation 30, The International Council on Combustion Engines, Germany, 2011

FINITE ELEMENT ANALYSIS OF OCCUPANT SAFETY IN THE CASE OF FAR SIDE IMPACT WITH A RIGID POLE

ANALIZA SIGURANȚEI PASAGERULUI DIN DREAPTA ÎN URMA UNEI COLIZIUNI LATERALE CU UN STÂLP RIGID, FOLOSIND METODA ELEMENTULUI FINIT

REZUMAT

Metoda elementului finit reprezintă instrumentul numeric actual, destinat cercetărilor și dezvoltărilor tehnologice, fiind implementat și utilizat în diferite medii de studiu virtuale. Analiza accidentelor rutiere face parte din această categorie de studii, fiind utilizată la nivel mondial. În cadrul unei lucrări științifice s-a concluzionat faptul că impactul lateral dintre un vehicul și un stâlp rigid, sau obiecte similare, este statistic semnificativ accidentelor rutiere fatale de pe teritoriul țării. În cadrul lucrării de față s-a realizat o simulare computerizată care implică impactul lateral cu stâlp rigid, cu scopul de a determina nivelul de siguranță al pasagerului de pe locul din dreapta. Rezultatele arată că autovehiculul studiat, existent deja pe piață și evaluat la cinci stele al nivelului de siguranță, nu mai corespunde în totalitate noilor cerințe.

Key-Words: *Finite Element Method, Occupant Safety, Far Side Impact*

Drd. ing.
Don POP
danpop1003@zahoo.com

Universitatea Tehnică din Cluj-Napoca,
Str. Memorandumului Nr. 28, 400114
Cluj-Napoca, Romania

1. INTRODUCTION

Computational tools help researchers to develop new technologies that are implemented in different areas of interest. Road crash studies are nowadays realized in virtual programs, which present many advantages in order to increase the traffic safety. Computational environment offers details about the causes and the effects produced during a crash. Nevertheless, the costs are significantly diminished and also it offers many research possibilities that in a real environment would be expensive or difficult to be implemented in a test phase. Finite element method represents a numerical computing technique which implies engineering knowledge and computational skills.

Authorities and other governmental organizations are implementing different crash scenarios that have to be fulfilled by the new produced cars. Otherwise, these could not be sold on the market. Examples of such organizations are: UNECE (United Nations Economic Commission for Europe), FMVSS (Federal Motor Vehicle Safety Standards), Euro NCAP (The European New Car Assessment Programme), IIHS (Insurance Institute for Highway Safety) and many others.

A recent statistical road crash study [7] was conducted based on a five year period database in order to evaluate fatal crashes occurred in curve and inclined plane on Romanian traffic roads. One of the many other statistically significant conclusions was found to be lateral impact between a vehicle and a rigid pole or similar objects. The main anatomical cause of death is not described in the database, but other papers like [5] concluded that thorax ribs fractures are the main fatal cause for frontal collisions.

Based on the findings from [7], in another research [8] it was simulated a sedan four door car in case of a lateral impact against a rigid pole. The car is a representative five star passenger vehicle which fulfilled the safety requirements of such an impact described by the UNECE new regulation from 2017.

Anthropomorphic test dummies are often used to predict the level of injury in motor vehicle collision [2], based on bio-dynamic characteristics which correspond to real situations. In this paper was used the latest side crash dummy model WorldSID 50% Male.

In this paper the novelty consists in testing the safety of the co-driver in the same case of lateral impact between the same vehicle and a rigid pole. Euro NCAP plans for 2020 to implement co-driver scenarios, named as far side collisions, involving the collision case between a passenger car and a movable barrier and also against a rigid pole. The scenarios consist actually of two sled tests based on the pulse value determined on B-pillar after

Fig. 1. Toyota Camry 2012 (left) and the structure of the finite element method model (right)

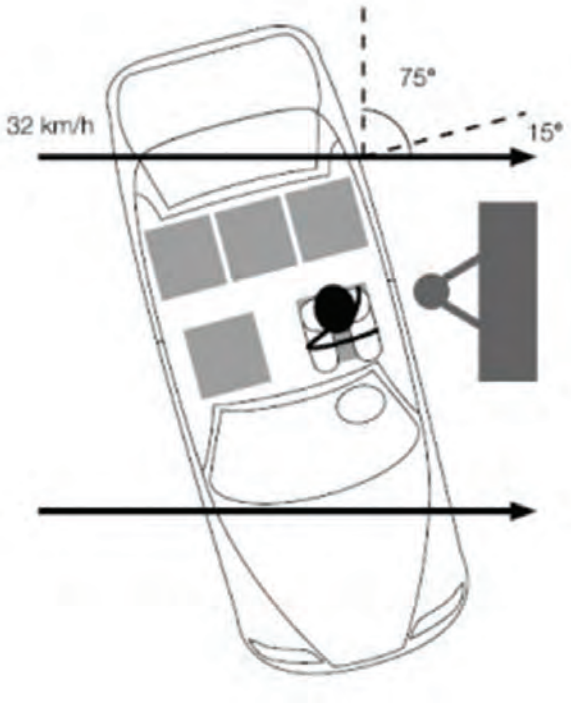

Fig. 2. UNECE 2017 regulation of a lateral pole collision, with one dummy (WorldSID 50% male) on driver side [9]

the whole car simulation tests are done. The requirements described by the new Euro NCAP test were implemented in this paper for this type of crash scenario.

2. METHODS

The road vehicle used for far side simulation was a five star Toyota Camry 2012 (Figure 1). The finite element model (Figure 1) was realized by the NCAC (National Crash Analysis Center) and validated by the NHTSA (National Highway Traffic Safety Administration) [6]. The finite model is a free model made available for each researcher.

The lateral impact scenario between the road vehicle and the rigid pole is based on the UNECE 2017 regulation (Figure 2), but implemented for the co-driver safety. The actual UNECE 2017 side crash test is described as follows: near-side collision, with only one dummy (WorldSID 50% Male) on driver side; the static pole is ideally rigid and has a standard diameter of 254 mm; impact velocity is 32 km/h under an angle of 75° [9].

Fig. 3. WorldSID 50% Male Dummy [4]

The finite element dummy model used in the paper is the latest version developed for lateral collisions. WorldSID 50% male dummy (Figure 3) was supplied by the LSTC (Livermore Software Technology Corporation) being compatible with the LS-DYNA software system. This dummy model has a weight of 74.88 kg [1].

Due to the dummy kinematic during the far side test, four marking grids (Figure 4) were implemented in order to evaluate the dummy excursion. The meaning of each parallel excursion line is described as follows:

- Red line – maximum intrusion – marking the maximum intruding point of the door panel after the crash;
- Yellow line – head excursion higher performance limit – marking the seat center line on the struck side;
- Green line – occupant interaction limit – marking 250 mm inboard from struck side seat centerline;
- Blue line – marking the vehicle center line [3].

The assessment criteria for the far side scenarios are listed in the following table. The evaluation consists of four body regions, the head, neck, chest and abdomen and pelvis and lumbar spine. Capping is applied to head, chest and abdomen and the test will not be validated if the red line is exceeded. If the head exceeds the green line, the occupant interaction limit, the score of the test will be reduced by 50% [3].

3. DATA ANALYSIS

The simulation was done using the LS-DYNA solver and for post-processing the model was uploaded in GNS Animator4 to visualize the kinematic of the co-driver during the impact. To capture the maximum values of the dummy's injury, the simulation time was set up to 200 ms. In Figure 5 was captured the maximum head excursion around 115 ms which exceeds the green line. This fact leads to a score diminution down

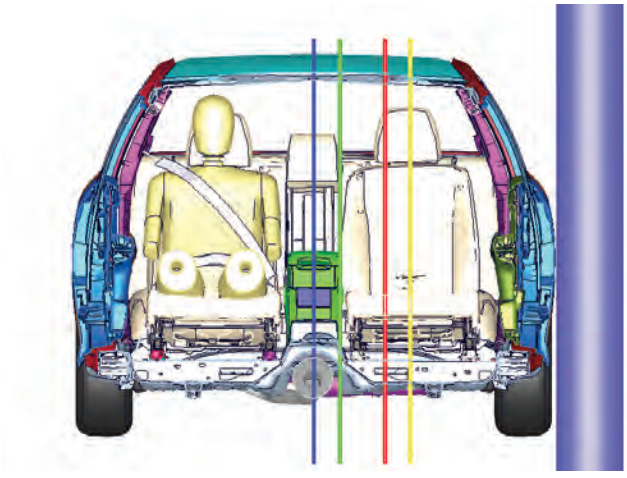

Fig. 4. Vehicle markings

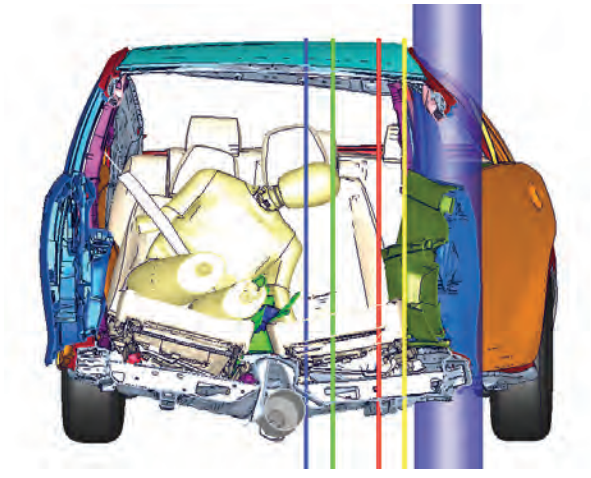

Fig. 5. The head excursion exceeds the occupant interaction limit line at 115 ms

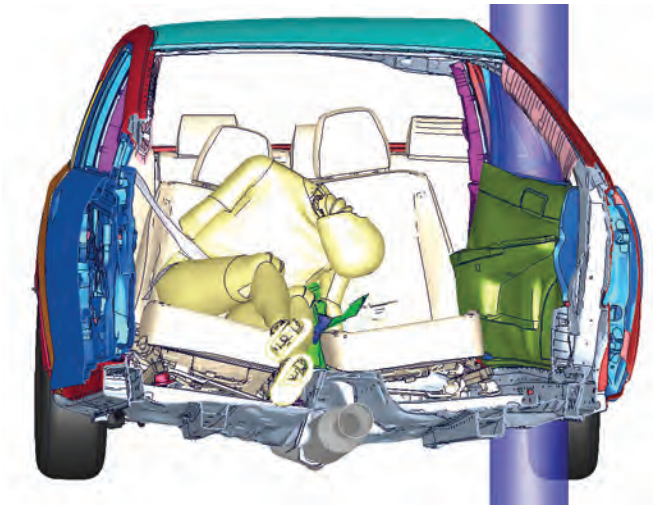

Fig. 6. Lower neck lateral flexion – kinematic at maximum value ms

Table 1 [3] Far side test – performance limits

	Criteria	Performance limits		
		Higher	Lower	Capping
Head	Head Injury Criteria15	500	700	700
	Resultant 3ms acceleration	72g	80g	80g
	Excursion		yellow line	red line
Neck	Tension Fz		3.74 kN	
	Lateral flexion Mx		50 Nm	
	Extension negative My		50 Nm	
Chest & Abdomen	Chest lateral compression	28 mm	50 mm	50 mm
	Abdomen lateral compression	47 mm	65 mm	65 mm
Pelvis & Lumbar	Pubic symphysis		2.8 kN	
	Lumbar Fy		2.0 kN	
	Lumbar Fz		2.84 kN	
	Lumbar Mx		100 Nm	

to 50% which means that the already producible Toyota Camry 2012 will not reach five star rating regarding new procedures from 2020.

As it can be seen in Figure 5, the dummy interacts with the center console. Depending on the height and stiffness of the center console, the dummy head excursion could be directly influenced. But a higher stiffness of the center console could worsen the pelvis force. It is essential to take into account that the belt buckle remains between dummy pelvis and center console, because it could have a negative influence on pelvis force too. Belt buckle could be redesigned or repositioned for the next car generations. The body in white floor has a direct impact of the dummy excursion. Better results could be obtained if the floor remains on a flat level. In this case the floor does not have a desired deformable behavior, which has a direct effect on the seats kinematic. Without using a restraint system the injury level will be significantly increased.

The worse value captured during the simulation (Figure 6) was registered in the neck area, at 158 ms, representing the lateral flexion of the neck. The value of 112.79 Nm is significantly higher than the limit value of 50 Nm

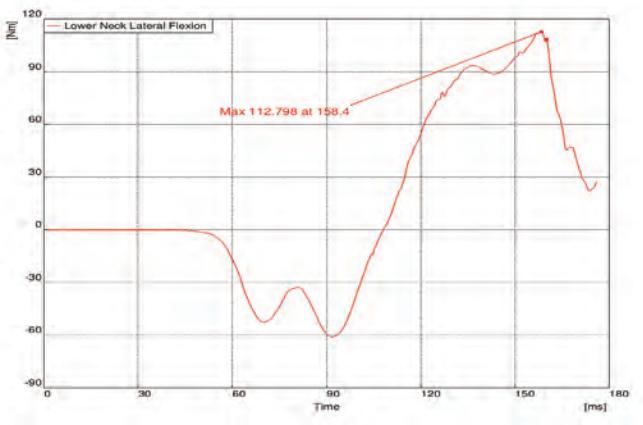

which means that this test will not end with the maximum rating.

For the actual manufactured cars, the main focus, regarding occupant safety measurements, was on the driver's side for the front and rear positions. Next car generation will implement auxiliary technologies in order to protect all passengers involved in car accidents. For far side situations, in the driver's seat there has to be implemented an additional side airbag that will deploy between the seats, in order to reduce the dummy excursion and to reduce the interaction effects between the driver and the co-driver during the impact. The driver's seat has to be robustly designed because its structure has to support two deployments of the side airbags in case of a far side situation. Next studies will be focused on the situation when this additional airbag will be mounted in the driver's seat. Nevertheless, the injury level of the rear passengers in these cases and which solution could be then implemented in order to reach the safety level have to be taken into account.

4. SUMMARY AND CONCLUSIONS

In this paper is presented a new case of impact scenario that Euro NCAP wants to implement for the new car generation, released in 2020. A five star sedan Toyota Camry 2012 was tested after this new regulation and it was found out that additional measurements have to be implemented in order to reach the same rating as before. A center airbag mounted in the driver's seat represents the optimal solution to increase the passenger safety, for far side impacts.

REFERENCES:

[1] CARHS, *Safety Companion*, 2017.

[2] Danelson, A., Kerry; Golman, J., Adam; Kemper, R. Andrew; Gayzik, F., Scott; Gabler, H., Clay; Duma, M., Stefan; Stitzel, D., Joel, *Finite element comparison of human and Hybrid III responses in a frontal impact*. Accident Analysis and Prevention. Vol. 85. pp. 125-156. 2015.

[3] European New Car Assessment Programme (Euro NCAP), *Far Side Occupant Test & Assessment Procedure*, Version 1.0. 2017.

[4] Humanetics Innovative Solutions, Inc., *EuroSID-2re Male Side Impact Dummy, SID-IIs Side Impact Female Dummy, WorldSID 50th Percentile Advanced Male Dummy*.

[5] Iraeus, Johan; Lindquist, Mats, *Development and validation of a generic finite element vehicle buck model for the analysis of driver rib fractures in real life nearside oblique frontal crashes*. Accident Analysis and Prevention. Vol. 95. pp. 42-56. 2016.

[6] Marzougui, D.; Brown, D.; Park, H., K.; Kan, C., D.; Opiela, K., S. *Development & Validation of a Finite Element Model for a Mid-Sized Passenger Sedan*. 13th International LS-DYNA Users Conference.

[7] Pop, Dan, *Application of generalized linear Poisson model for fatal crashes occurred on curve and inclined plane*. In: UTPres. Presented at AMMA 2018 Congress Cluj Napoca. 2018.

[8] Pop, Dan, *Finite element analysis of occupant safety in the case of vehicle lateral impact with a rigid pole*. In: UTPres. Presented at AMMA 2018 Congress Cluj Napoca. 2018.

[9] United Nations: *Uniform provisions concerning the approval of vehicles with regard to their Pole Side Impact performance (PSI)*. Addendum 135 – Regulation No. 135.

CONSIDERATIONS ON THE GAS EXCHANGE PROCESS IN INTERNAL COMBUSTION ENGINES WITH OPPOSITE PISTONS

CONSIDERAȚII PRIVIND PROCESUL DE SCHIMB DE GAZE LA MOTOARELE CU ARDERE INTERNĂ CU PISTOANE OPUSE

REZUMAT

Motoarele cu ardere internă cu pistoane opuse prezintă posibilitatea creerii unui mecanism motor echilibrat dinamic având un număr mai mic de cilindri în comparație cu motoarele convenționale. Schimbul de gaze are o importanță deosebită atât în dezvoltarea generală a motorului, cât și în dezvoltarea camerei de ardere. Condițiile de mișcare, temperatura și diluarea cu gaze arse în care se găsește încărcătura din cilindru la închiderea ferestrelor de baleiaj, influențează major procesul de formare a amestecului carburant și al arderii.

Key-Words: *Internal combustion engines with opposite pistons, Gas exchange process, Combustion chamber.*

Prof. dr. ing.
Adrian TUSINEAN[1]
atusinean@tm-lift.com

Prof. dr. ing.
Peter HOFBAUER[1]

S.l. dr. ing.
Horia BELES[2]
dan.moldovanu@auto.utcluj.ro

S.l. dr. ing.
Sebastian RADU[3]

[1] ThermoLift, Inc., 31572 Industrial Rd Suite 200, Livonia, 48150, Michigan, USA
[2] Universitatea din Oradea, Str. Universității, nr.1, 410087, Oradea, Romania
[3] Universitatea Transilvania din Brașov, Str. Politehnicii, nr. 1, 500024 Brașov, România

1. INTRODUCTION

One of the most efficient methods to reduce the polluting exhaust gases generated by an internal combustion engine is to reduce the effective specific fuel consumption. Apart from the reduction of the polluting exhaust gases, the reduction of the effective specific fuel consumption of the internal combustion engine is an important aspect also from the point of view of cost reduction in the exploitation of the vehicle or of the aggregate that the respective engine is attached to. The effective specific fuel consumption of an engine is influenced by a lot of parameters, out of which: the loss of power from the internal friction of the crank-piston mechanism, the loss due to the pressure variation phenomenon, the architecture of the combustion chamber and the ratio between the volume where the combustion and the expansion take place and the area of the surfaces that represent the boundaries of that volume, play a very important role [1][2].

The present tendencies in the design and development of internal combustion engines are, on the one hand, the reduction of the total cylinder capacity (downsizing) with maintaining and even the increasing of power through supercharging, and, on the other hand, the decrease in the number of cylinders, in order to obtain an as large as possible volume per cylinder, for a given cylinder capacity. By this, one considers the decrease in the loss of specific power due to friction and to the heat exchange process with the environment, which finally leads to the reduction in the effective specific fuel consumption.

For the conventional four stroke engines, the challenges involved consist in the high levels of pressure and temperatures in the thermodynamic processes, while the total cylinder capacity decreases and the power level remains constant. Also, the decrease in the number of cylinders is generally limited to four, out of the balancing condition of the crank-piston mechanism.

Another way to increase the specific volumetric power is to reconsider the two-stroke engines. Supposing that the problems regarding the gas exchange process and the polluting exhaust gases, the two-stroke engines present the advantage of a lower loss of specific power through friction, with respect to the four-stroke engines. Due to the fact that the thermodynamic cycle of the two-stroke engines requires a single revolution of the crankshaft, for the same engine speed and power one can obtain lower combustion pressures in comparison with the four-stroke engines.

The engines with opposite pistons present the possibility to create a dynamically balanced crank-piston mechanism with a lower number of cylinders in comparison with the conventional engines. Also, the total stroke of the crank-piston mechanism is divided between the two pistons which are displaced one against the other in a cylinder.

Therefore, for the same engine speed, the mean velocity of the piston is considerably reduced, and also the engine friction is lower. On the other hand, if the mean velocity of the piston is kept constant, the engine speed is doubled, and, such, the engine power is doubled [3][4].

For the two-stroke engine with opposite pistons the gas exchange process with equal current scavenging can be adapted, one of the pistons controlling the exhaust light while the other piston controls the intake light. Also, this type of mechanism presents the possibility of a relatively simple implementation of an asymmetric distribution diaphragm with respect to the bottom dead center.

Considering the previously mentioned, the development of a compression ignition engine with opposite pistons is not only an interesting scientific research project, but also one with special practical implications, starting with the vehicle propulsion, and leading to the flight equipment propulsion, to stationary and marine applications.

The analysis of the gas exchange process will be accomplished on a compression ignition engine with opposite pistons, with two opposing cylinders. The concept of this engine has been patented in 1999, having been dubbed EM100D, by one of the authors of this paper, Prof. Dr. Eng. Peter Hofbauer: "Internal combustion engine with a single crankshaft and having opposed cylinders with opposed pistons", U.S. patent n. US6,170,443, B1, Santa Barbara, 1999 [5][6].

2. CONSIDERATIONS ON THE GAS EXCHANGE PROCESS

The gas exchange process has a significant importance in both the general development of the engine and the design of the combustion chamber. The motion conditions, the temperature and the dilution with burnt gases that characterize the cylinder charge when closing the scavenging lights, majorly influence the formation process of the air-fuel mixture and the combustion process [7][8].

In order to obtain an efficient burning throughout the whole range of engine speed and load, it is necessary to carefully consider the choice of architecture and the correct dimensioning of the components in the gas exchange system. Unlike the four-stroke engine, in the two-stroke engine, the gas exchange process lasts for a shorter time span and takes place around the bottom dead center. In order for the scavenging of the cylinder to happen it is necessary that the pressure in front of the inlet lights to be larger than the pressure in the cylinder, while the pressure in the cylinder needs to be larger than the pressure behind the exhaust lights. These pressures are not constant during the gas exchange process, but have a pronounced undulatory behaviour, a situation which can imply difficulties in the scavenging process. The pressure waves in front of and behind the intake and exhaust lights are greatly influenced by the engine speed and load, by the volumes of these areas, by the lengths of the inlet and exhaust manifolds, and also by the intake and exhaust lights timing.

The fresh charge enters the cylinder through the intake lights at the same time that the exhaust gases leave the cylinder through the exhaust lights. Thus, between the fresh charge and the exhaust gases a contact surface is created, with a shape and regularity that majorly influence the unwanted mixture between the two fluids. Should the ideal situation of a perfect scavenging be considered, this contact surface would have the minimum possible area given by the geometry of the cylinder and the chosen type of scavenging and it would act like an exhaust piston, stopping whichever mixture between the fresh air and the burnt gases. In reality, the shape of this contact surface is irregular and variable in time during the scavenging process, and depends on various parameters out of which there can be mentioned the pressure waves from the gas exchange system, the orientation and the shape of the intake and exhaust lights, the engine speed, the supercharging system, the shape of the piston head and the geometry of the combustion chamber, etc. Finally, the shape of this surface, and also the size and the velocity direction of the fluid molecules in its vicinity influence the quantity of residual gases that remain stuck in the cylinder at the end of scavenging, and also influence the fresh air quantity which slips through the exhaust lights, which short circuits the cylinder.

In the case of a two-stroke engine, the important parameters in the development of the combustion chamber, such as the air excess coefficient "λ" and the compression ratio "ε" are closely related to the gas exchange system. At the two-stroke engine, the computation of the air excess coefficient "λ" is a much more complex issue than in the case of the four-stroke engine. On the one hand, it is needed to determine the quantity of fresh air trapped inside the cylinder, as well as the quantity of exhaust gases stuck inside the cylinder, at the closing of the intake lights. The burnt gases from the cylinder contain oxygen molecules which have not reacted with the fuel in the combustion phase of the previous cycle, as a consequence of the air excess and incomplete burning. The fresh air that short circuits the cylinder during scavenging does not participate in the combustion process, therefore, the measurement of the total flow of fresh air which passes through the engine and it being considered to the number of cycles, is insufficient to determine the air excess coefficient. Moreover, the use of oxygen sensors in the exhaust manifolds does not offer enough precision for the determination of the air excess coefficient "λ", because of the short circuiting of the cylinder by a part of the fresh charge. The real compression stroke for a two-stroke engine only starts after the closing of the intake lights, and this moment actually defines real cylinder capacity of the engine. Consequently, it is necessary to obtain an acceptable compromise between the need of an as large as possible surface of the intake and exhaust lights and the need of an as large as possible real cylinder capacity, for a given cylinder bore and engine stroke.

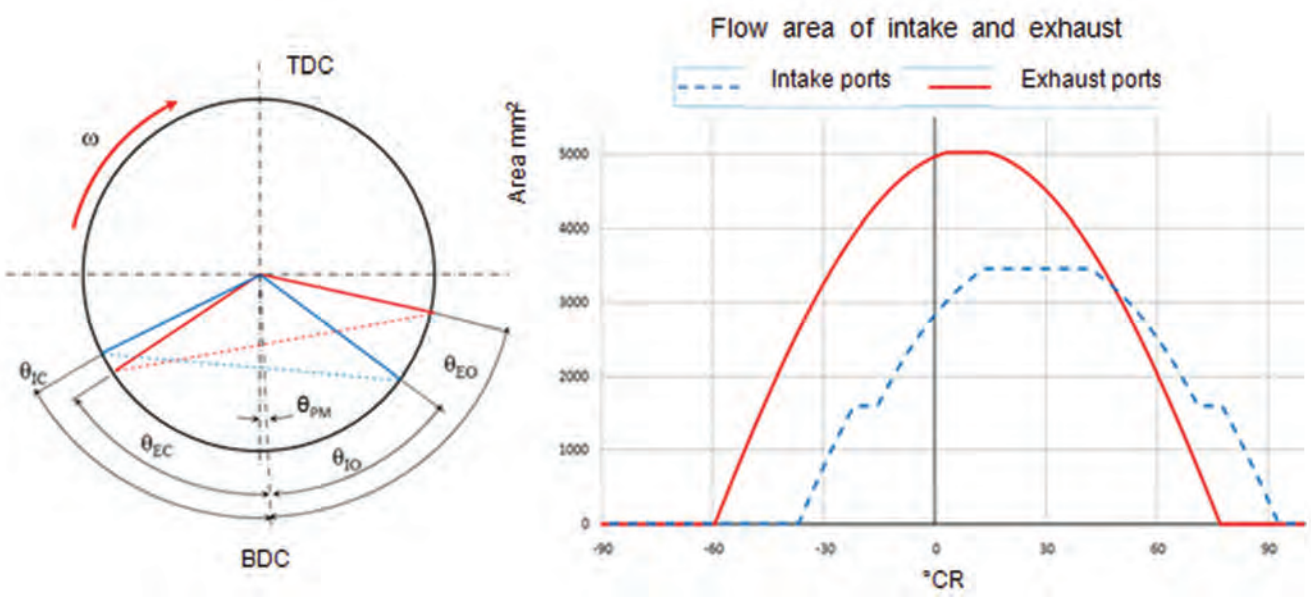

Fig. 1. The distribution diagram and the area of the intake and exhaust lights of the EM100D engine.

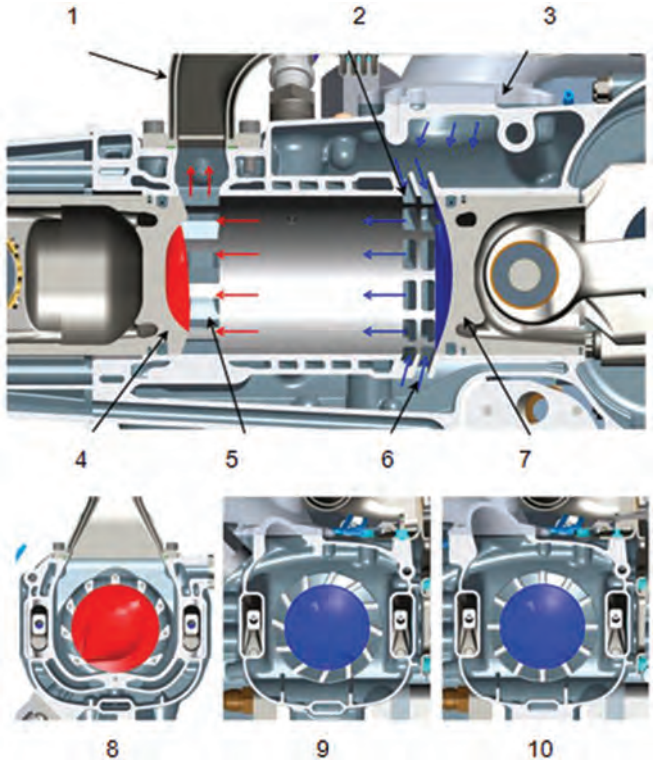

Figure 2. The architecture of the gas exchange process in the EM100D engine:
1 – exhaust manifold
2 – swirl intake ports
3 – intake manifold
4 – exhaust piston
5 – exhaust ports
6 – straight intake ports
7 – intake piston
8 – section through exhaust ports
9 – section through intake swirl ports
10 – section through straight intake ports.

3. THE PARAMETERS OF THE GAS EXCHANGE PROCESS

For the analysis of the gas exchange process the following parameters are defined [9], [10], [11]:

The delivering coefficient "L" is a measure of the air quantity delivered to the engine and which crosses all the intake lights, divided to the engine volume:

$$L = \frac{V_{liv}}{V_{cil}} \tag{1}$$

In equation (1), "V_{liv}" represents the air quantity supplied to the engine's cylinders, while "V_{cil}" is the cylinder capacity of the engine. The air quantity that crosses the intake lights is divided in two. One part short circuits the cylinder and is evacuated through the exhaust lights, while the second part of it is kept inside the cylinder and takes part in the next cycle's combustion phase.

The retaining coefficient "η_r" is the ratio between the air mass trapped inside the cylinder and the air quantity that passes through the intake lights:

$$\eta_r = \frac{V_{ret}}{V_{liv}} \tag{2}$$

Where "V_{ret}", represents the fresh air quantity trapped inside the cylinder. The retaining coefficient represents the air quantity delivered to the engine and retained in the cylinders, while the rest of it is lost through the exhaust lights.

The relative charging coefficient of the cylinder "C_{rel}" is the ratio between the charge volume in the cylinder and the cylinder volume:

$$C_{rel} = \frac{V_{inc}}{V_{cil}} \tag{3}$$

Where "V_{inc}" is the charging of the cylinder and represents the sum between the air quantity retained in the cylinder "V_{ret}" and the residual burnt gases quantity stuck inside the cylinder after the evacuation phase of the gas exchange process ended "V_{rez}":

$$V_{inc} = V_{ret} + V_{rez} \tag{4}$$

The scavenging efficiency "η_{bal}" is the ratio between the air volume retained in the cylinder "V_{ret}" and the cylinder charge "V_{inc}":

$$\eta_{bal} = \frac{V_{ret}}{V_{inc}} \tag{5}$$

The mixture's purity coefficient "η_p" is the ratio between the air volume in the cylinder "V_{pur}" and the charge volume of the cylinder "V_{inc}". During combustion in Diesel engines there remains a certain quantity of oxygen, due to the air excess.

Some of these oxygen molecules are also found in the residual burnt gases "V_{rez}" in the cylinder. Consequently, the gas mixture in the cylinder at the end of gas exchange process includes three parts: the fresh air quantity retained in the cylinder "V_{ret}" at which is added the quantity of the exhaust products "V_{cp}", which are also found in the residual gas volume "V_{rez}" and, additionally, the fresh air quantity from the residual gas volume "V_{rez}-V_{cp}":

$$\eta_p = \frac{V_{pur}}{V_{inc}} = \frac{V_{inc} - V_p}{V_{inc}} = 1 - \frac{V_p}{V_{inc}} \tag{6}$$

The cylinder charging efficiency "η_{inc}" is the ratio between the air volume retained in the cylinder and the cylinder volume:

$$\eta_{inc} = \frac{V_{ret}}{V_{cil}} \tag{7}$$

The cylinder charging efficiency is a measure for the successful filling up of the cylinder by fresh air. From equations (1), (2) and (7) there results:

$$\eta_{inc} = L \cdot \eta_r \tag{8}$$

The scavenging coefficient "R_s". In all of the above equations, the described volumes correspond to the normal atmospheric temperature

and pressure conditions. In the case of supercharged engines it is preferred to make the reference between the delivered air mass "M_{liv}" and the air mass which might occupy the cylinder volume in the temperature and pressure conditions of the intake lights "M_{cil}". Considering this aspect, the scavenging coefficient is defined as the ratio between the two measures:

$$R_s = \frac{M_{liv}}{M_{cil}} \quad (9)$$

The cylinder residual gas coefficient "C_{crez}" is the ratio between the residual gas quantity found in the cylinder "M_{crez}" and the total quantity of gases in the cylinder "M_{cil}":

$$C_{crez} = \frac{M_{crez}}{M_{cil}} \quad (10)$$

The coefficient of residual gases found in the exhaust lights "C_{erez}"is the ratio between the exhaust gas quantity exiting the exhaust lights "M_{erez}" and the total quantity of gas mixture that exits the exhaust lights "M_{evac}":

$$C_{erez} = \frac{M_{erez}}{M_{evac}} \quad (11)$$

For the EM100D engine there has been chosen the equal currents scavenging with asymmetric advance and delay timing for the exhaust and intake lights, with respect to the bottom dead centers (BDC) of the cylinder BDC1 and BDC2. The Figure 1 depicts the engine distribution diagram and the area of the intake and exhaust lights, where there can be observed that the exhaust lights are closed before the intake lights, after the bottom dead center of the cylinder.

In Figure 1, the following notations have been made:

- θ_{EO} – the opening angle of the exhaust light;
- θ_{IO} – the opening angle of the intake light;
- θ_{EC} – the closing angle of the intake light;
- θ_{EC} – the closing angle of the exhaust light;
- θ_{PM} – the deviation angle of BDC relative to the 180º position with respect to TDC (top dead center);
- CR – crankshaft rotations.

In Figure 2 it is presented the chosen architecture for the gas exchange in the EM100D engine, in which one can observe that the fresh air is introduced at one end of the cylinder through the intake lights, while the exhaust gases are evacuated at the opposite end of the cylinder through the exhaust lights.

In order to obtain an optimum scavenging it is necessary that the fresh air supply to replace the burnt gases in the whole volume of the cylinder. The replacement of the burnt gases around the cylinder axis can be accomplished in the situation when the fresh air introduced through the intake lights has a high penetration, and the replacement of the burnt gases at the periphery of the cylinder, close to the walls, can be realized in the situation when the fresh air supply that enters the cylinder, has a reduced penetration.

In order to simultaneously fulfill the two conditions, is has been chosen the division of the intake lights into two columns: the turbulence intake light column and the column of the straight intake lights. Both columns are oriented in an opposite direction with respect to the top dead center of the cylinder and of the exhaust lights in order to favor the replacement of the exhaust gases from the center of the cylinder. The first column generates a turbulent motion of the fresh charge which is maintained during the whole scavenging process. The turbulent motion generates a centrifugal force which pushes the fresh charge, which is denser than the residual gases, towards the periphery of the cylinder center. The second column directs the fresh air in a radial direction towards the center of the cylinder.

4. CONCLUSION

The orientation of the two columns oppositely to the exhaust lights stops, on the one hand, the rapid short circuit of the cylinder by the fresh charge that enters through the turbulent flow lights column, while, on the other hand, it helps to enlarge the penetration of the fresh air supply which enters the cylinder through the straight lights column.

The intake and exhaust lights are placed radials on the whole circumference of the cylinder, in order to regularize as much as possible the contact surface between the fresh charge and the residual gases.

The uniformly radial placement is also desired from the point of view of the uniform thermal loading of the cylinder, especially in the case of the exhaust lights, around which the thermal deformation of the cylinder must be circular, in order not to deform the exhaust piston rings.

Lucrare prezentată în cadrul Congresului Internațional al SIAR de Inginerie a Autovehiculelor și Transporturilor – AMMA 2018, 17.10 – 19.10.2018, Cluj-Napoca, România, și publicată în volumul „AMMA 2018 – The IVth International Congress, Selection of Papers", UTPress, ISBN 978-606-737-314-1.

REFERENCES:

[1] Hofbauer, Peter and Tusinean, Adrian, *Internal combustion engine*. No. 7,469,664 B2, 2008.

[2] Hofbauer, Peter and Tusinean, *Internal combustion engine*. No. 7,578,267 B2, 2009.

[3] Hofbauer, Peter, *Internal combustion engine with a single crankshaft and having opposed cylinders with opposed pistons*. SAE International, No. US 06170443, 2001.

[4] Hofbauer, Peter, *Opposed piston opposed cylinder (opoc) engine for military ground vehicles*. SAE International, DOI:10.4271/2005-01-1548, 2005.

[5] Hofbauer, Peter and Tusinean, Adrian, *Air scavenging for an opposed piston opposed cylinder free piston engine*. No. US 6,941,904 B1, 2005.

[6] Kalkstein, James; Röver, Wulf; Campbell, Brian; Zhong, Lurun; Huang, Hua; Liu Jing, Ping; Tatur, Marek; Geistert, Andreas and Tusinean, Adrian, *Opposed piston opposed cylinder (opoc™) 5/10 kW heavy fuel engine for UAVs and APUs*. SAE Technical Paper 2006-01-0278, DOI: 10.4271/2006-01-0278, 2006.

[7] Schmuecker, J., Guerich, G. and Tusinean, Adrian, *Hydraulic sinchronizing coupler for a free piston engine*. No. US 7,077,080 B2, 2006.

[8] Tusinean, Adrian; Peng, Liu and Hofbauer, Peter, *Piston Stopper for a Free Piston Engine*. No. US 6,973,898 B1, 2005.

[9] Tusinean, Adrian, *Piston Guides for a Free Piston Engine*. No. US 7,032,548 B2, 2006.

[10] Tusinean, Adrian, *Development of a diesel combustion chamber for a 100 mm opposed piston engine*. The 11th International Congress CONAT, Brasov, ISSN: 2096-0401, 2010.

[11] Tusinean, Adrian, *Contributions to development of combustion chambers for opposed-piston engines*. PhD Thesis, Transilvania University of Brasov, 2013.

STEADY STATE ENGINE EFFICIENCY SPECIFIC TO SERIES HYBRID ELECTRIC VEHICLES

EFICIENȚA REGIMURILOR DE FUNCȚIONARE STABILIZATE, SPECIFICE MOTOARELOR CU ARDERE INTERNĂ CARE ECHIPEAZĂ AUTOVEHICULELE HIBRID ELECTRICE

REZUMAT

Regulamentele Comisiei Europene impun ca până în anul 2030 să se reducă în medie cu 30 % emisia de CO_2 provenită de la noile autoturisme și autovehicule comerciale ușoare, în raport cu valorile limită ale anului 2020. În acest context, autovehiculele hybrid electrice (AHE) devin un segment din ce în ce mai important din întreg parcul auto European. În cadrul AHE se poate realiza un management energetic cu mult mai eficient decât la autovehiculele clasice. De aceea AHE reprezintă o soluție prin care se poate reduce consumul de combustibil și emisiile poluante datorate transportului rutier. Autovehiculele clasice și AHE-paralel funcționează frecvent la regimuri tranzitorii, în schimb AHE-serie funcționează la regimuri stabilizate. Obiectivul principal al acestui articol este acela de a evidenția avantajele AHE-serie față de AHE-paralel sau cu alte cuvinte avantajele regimurilor stabilizate față de cele tranzitorii, prin cercetări experimentale. Regimurile tranzitorii ale motorului cu ardere internă sunt obținute succesiv prin variația: turației, a sarcinii și a ambilor parametri în același timp. Valorile astfel obținute sunt comparate cu cele rezultate în timpul funcționării motorului cu ardere internă la regimuri stabilizate. Performanțele energetice și ecologice ale motorului obținute în cadrul regimurilor stabilizate sunt mai mari față de cele din regimurile tranzitorii, diferența cea mai mică observându-se la variația sarcinii.

Key-Words: *hybrid electric vehicle – HEV, engine, transient state, steady state.*

S.l. dr. ing.
Cristian-Ioan LEAHU
catalin.zaharia@upit.ro

Conf. dr. ing.
Stelian TARULESCU

S.l. dr. ing.
Sebastian RADU
dan.moldovanu@auto.utcluj.ro

Universitatea Transilvania din Brașov,
Str. Politehnicii, Nr. 1, 500024 Brasov, Romania

1. INTRODUCTION

At present are established EU fleet wide targets value for 2020 of 95 CO_2 g/km for passenger cars and 147 CO_2 g/km for light commercial vehicles. This values are based on the New European Driving Cycle test procedure (NEDC).

The European Commission regulatory proposed for the period after 2020 CO_2 emission targets for passenger cars and light commercial vehicles. Average CO_2 emissions of the EU fleet of new passenger cars and light commercial vehicles in 2025 will have to be 15 % lower than in 2020 [1]. For 2030, CO_2 targets value for both type vehicles are 30 % lower than in 2020. The values will be based on the Worldwide Harmonized Light Vehicle Test Procedure (WLTP).

These CO_2 limits values are almost impossible to meet if unless used the hybrid electric vehicle powertrain.

1.1 The Hybrid Electric Vehicle

Hybrid electric vehicles (HEV) are becoming a more and more important vehicle segment in the European car park. Based on the statistics from domain, in the year 2017, in Europe, 431.504 HEV (full and mild hybrids) have been registered. Which represent a 54.8% increase of new HEV registered in 2017 compared to the 2016.

HEVs can be classified based on the degree of hybridization: Micro-Hybrid, Mild-Hybrid and Strong-Hybrid. Depending on the way in which the energy flow is transmitted, the Strong-Hybrid type systems can be divided into three types: serial, parallel and Power Split HEV (Figure 1) [3] [4].In the case of HEV a more efficient energy management can be achieved compared to the conventional internal combustion engine powered vehicles (Figure 2). Due to this reason, HEV represent a viable solution throughout which a diminishing of the fuel consumption as well as vehicle emissions can be achieved [5] [6].

Energy management in case of HEV that use a parallel drivetrain is based on the fact that the mechanical energy of the engine is transmitted, based on requirements, to the vehicle's wheels and/or to the generator, and afterwards stored in batteries. Moreover, during vehicle deceleration, the generator creates electricity, which is then stored in batteries for future vehicle propulsion purposes.

Series HEV, are usually powered by electric traction motors. The mechanical energy produced by the engine is converted into electrical energy used to power the traction motors and eventually the wheels. The main advantage of series drivetrain HEV is that the engine operates in a steady regime compared to parallel HEV or even conventional internal combustion engine powered vehicles, where the engine operates frequently in transitory regimes [7].

The NEDC, is supposed to generally represent the typical usage of a vehicle in Europe. The performances of engines during transitory regime functioning are significantly superior compared to steady state regimes. The main objective of this paper is to emphasis this advantages of steady state engines throughout experimental researches compared to transitory regimes.

2. METHODOLOGY AND RESULTS OF EXPERIMENTAL RESEARCH

The experimental research was carried out at Transilvania University of Brasov, ICDT - Research & Development Institute. The engine used for experimental investigation is an AVL Single Cylinder Compression Ignition Engine type 5402.

For experimental the AVL engine, operated in two modes: at steady state (similar to the series HEV) and transient state (similar to the conventional vehicles and parallel HEV).

In stabilized regimes, the engine was run at three engine speeds: 1500, 1750, 2000 rpm's and three different engine loads: 20%, 30% and 40%. As shown in Table 1, the transient regimes were achieved with the following three scenarios: constant engine speed and variable engine load; constant engine load and variable engine speed; both, the load and the speed are variable. In fact, three situations were simulated

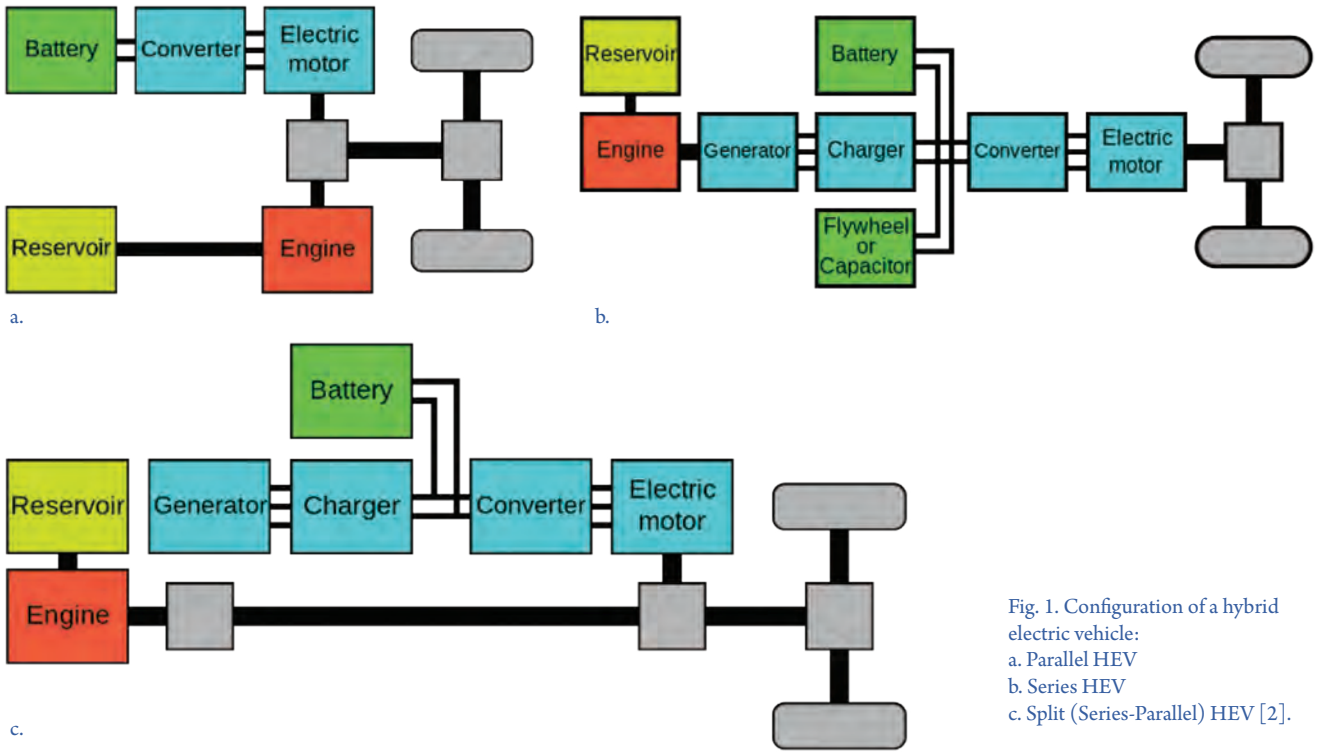

Fig. 1. Configuration of a hybrid electric vehicle:
a. Parallel HEV
b. Series HEV
c. Split (Series-Parallel) HEV [2].

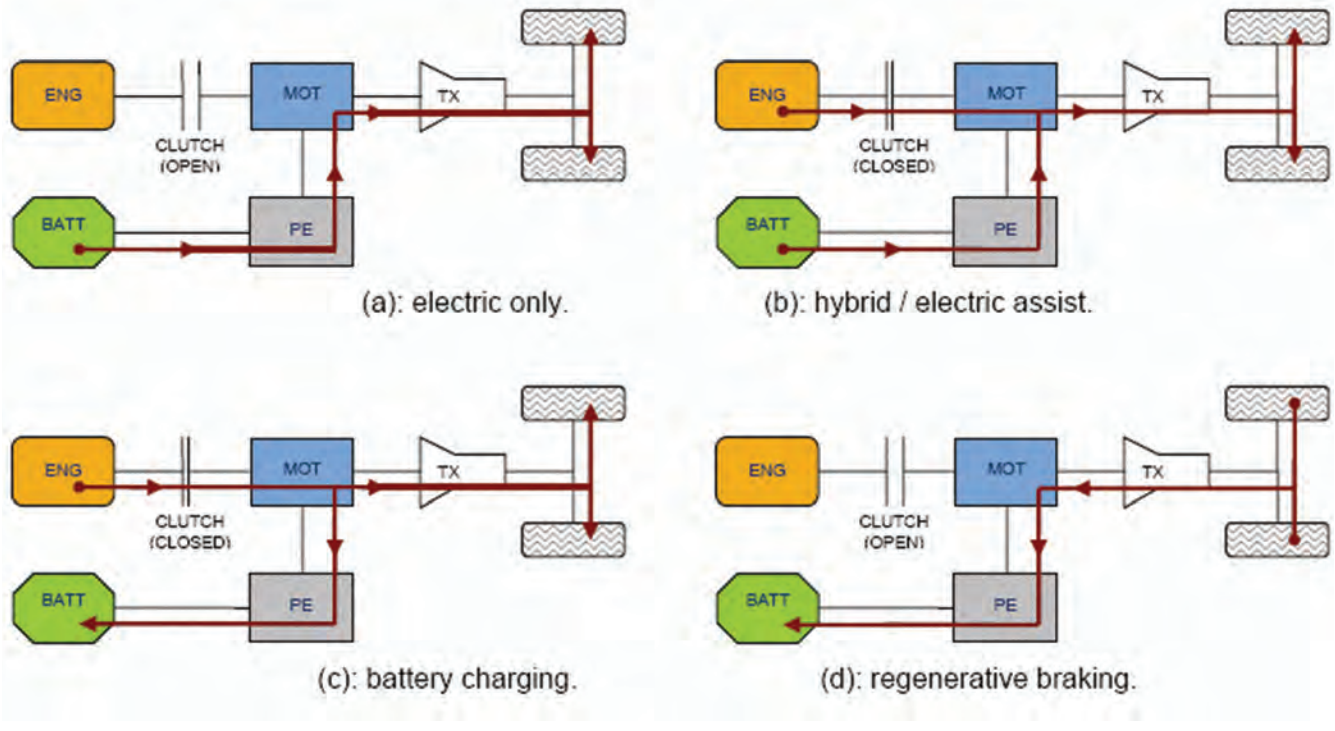

Fig. 2. Some representative modes for a parallel hybrid configuration [2].

during the operation of the vehicle, namely:

1. Vehicle's resistances are increasing, but the engine acceleration remains unchanged, which means that the engine speed is reduced;
2. Vehicle's resistances are increasing, but engine speed remains quasi-constant due to engine acceleration;
3. The power surplus obtained through the engine acceleration is higher than the resistance level, so an engine speed increase occurs.

The experimental results obtained in the regimens expressed in Table 1 are shown in Figures 3-5. For example, Figure 3a, shows that the engine running successively at steady state: 1500 rpm / 20%, 1750

Table 1. Experimental research strategy

Comparison 1: constant speed and variable load		Comparison 2: variable speed and constant load		Comparison 3: variable speeds and loads
Speeds [rpm] / Loads % - Steady state				
1500 / 20	2000 / 20	1500 / 20	1500 / 40	1500 / 20
1500 / 30	2000 / 30	1750 / 20	1750 / 40	1750 / 30
1500 / 40	2000 / 40	2000 / 20	2000 / 40	2000 / 40
Speeds [rpm] / Loads % - Transient state				
1500 / 20-40	2000 / 20-40	1500-2000 / 20	1500-2000 / 20	1500-2000 / 20-40

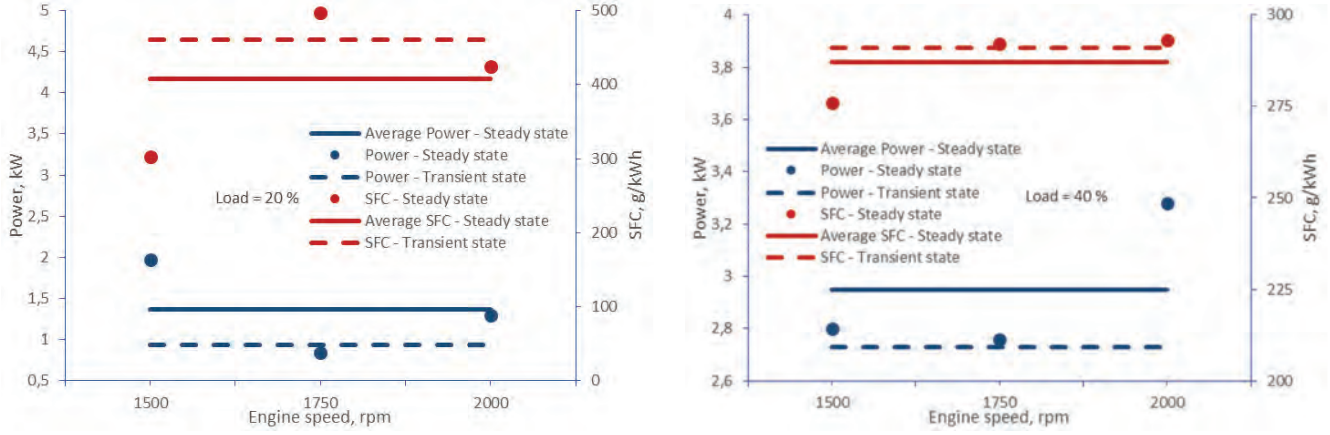

Fig. 3. The average and absolute value of the power and SFC of the engine operated at steady and transient state (variation speed: 1500-2000 rpm): a. 20 % load; b. 40 % load.

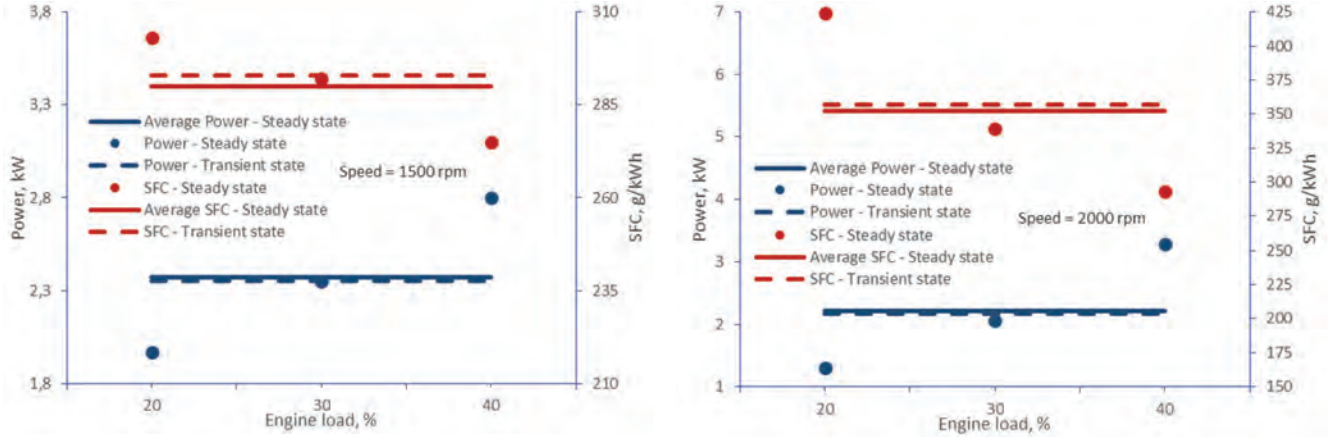

Fig. 4. The average and absolute value of the power and SFC of the engine operated at steady and transient state (variation load: 20-40 %): a. 1500 rpm engine speed; b. 2000 rpm speed.

rpm / 20% and 2000 rpm / 20% developed a power of 1.97 kW, 0.84 kW and 1.3 kW (the blue dots). Average power is considered to be 1.37 kW (the continuous blue line). Instead, if the engine is running at transient speed rising from 1500 rpm to 2000 rpm then the engine develops a power of 0.94 kW (the discontinuous blue line). At the same time, the engine has a fuel consumption of 203 g/kWh, 497 g/kWh and 424 g/kWh (the red dots) at steady state with a mean value of 408 g/kWh (the continuous red line). In transient state the consumption value is 460 g/kWh (the discontinuous red line). These experimentally obtained values highlight the advantages of series HEV engines compared to classic engines. A 46 % higher power and a lower specific fuel consumption (SFC) of 11% were obtained if the

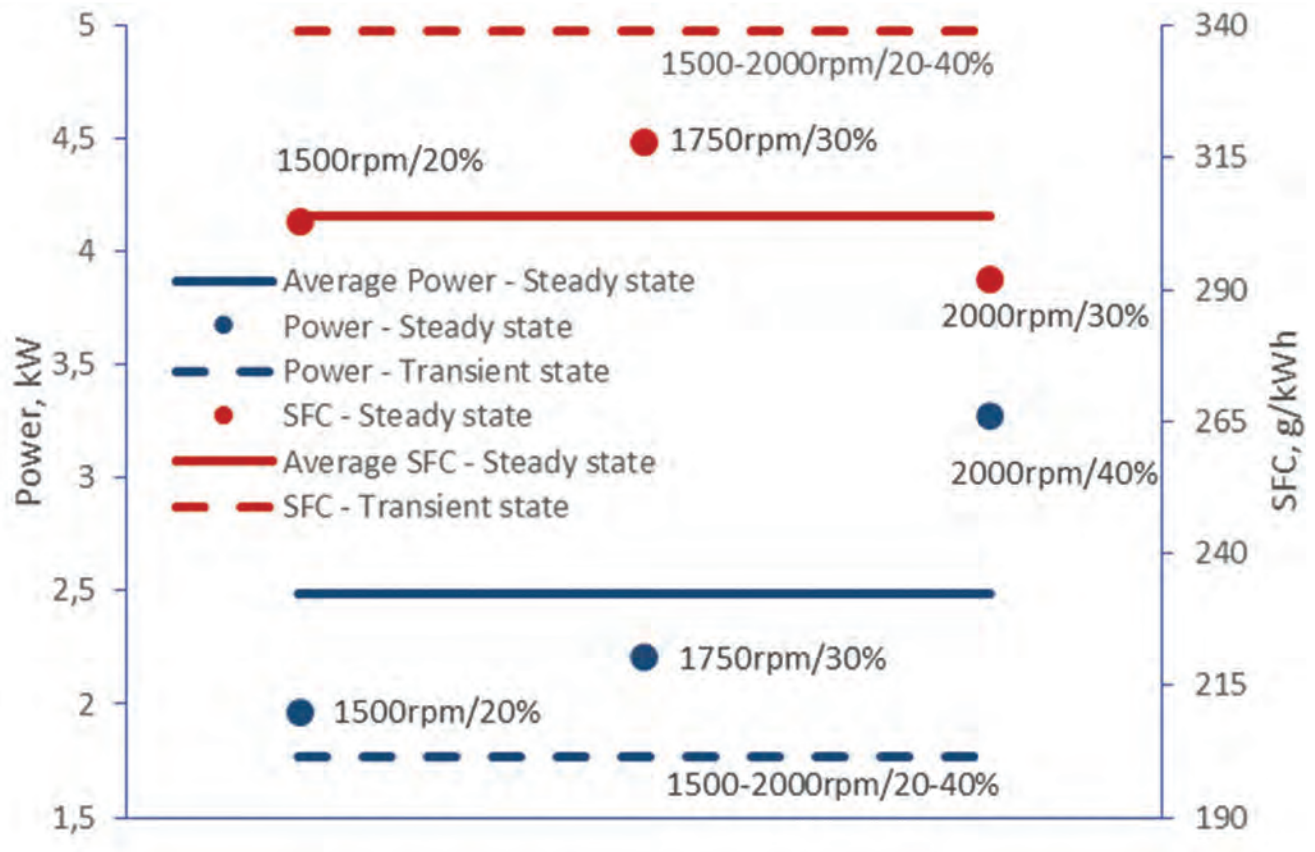

Fig. 5. The average and absolute value of the power and SFC of the engine operated at steady and transient state (20-40 % variation load and 1500-2000 rpm variation speed).operated at steady and transient state (variation load: 20-40 %): a. 1500 rpm engine speed; b. 2000 rpm speed.

engine functioning to steady state at series HEV.

If the Figures 3-5 are further analyzed is possible to identify the steady state the engine with the highest power and the lowest fuel consumption. Or in other words, the state at which series HEV would have maximum performance compared to conventional vehicles.

It can be noticed that the engine speed change has the greatest influence on engine power and SFC during the transient regimes. In particular, by increasing the engine speed, the inertia forces of the moving parts increases. The value of the inertia forces is higher during engine acceleration. It also increases the intake air speed entering the engine cylinders and reduces the intake time. Thus, fuel burning in cylinders is affected during transient regimes [8].

By increasing only the engine load, it will change the amount of diesel fuel injected into the cylinders. Thus, the ratio from the amount of intake air and the amount of fuel in the cylinders is different during the transitory regimes relative to the stable regimes, which may affect the quality of the combustion. The difference between this values obtained in the stabilized and transient regimes (as it can see in Figure 4) is minimal.

The series HEV equipped with a diesel engine that operates at steady state prove to be a viable solution that highest power, reduces the fuel consumption and, implicitly, the emission of CO_2.

5. CONCLUSION

In the case of steady regimes, the engine's performance and environmental characteristics are higher than for the transient regimes. The increase of engine speed in transient regimes mostly affects the engine's performance and environmental performance. One of the most important advantage of series drivetrain HEV is that the engine operates in a steady regime compared to parallel HEV or even conventional internal combustion engine powered vehicles, where the engine operates frequently in transitory regimes.

Lucrare prezentată în cadrul Congresului Internațional al SIAR de Inginerie a Autovehiculelor și Transporturilor – AMMA 2018, 17.10 – 19.10.2018, Cluj-Napoca, România, și publicată în volumul „AMMA 2018 – The IVth International Congress, Selection of Papers", UTPress, ISBN 978-606-737-314-1.

REFERENCES:

[1] *https://ec.europa.eu/clima/policies/transport/vehicles/proposal_en;*

[2] *https://en.wikipedia.org/wiki/Hybrid_vehicle_drivetrain#Parallel_hybrid;*

[3] Iota, C., *Bosch – Technology and Know-How for Hybrid Vehicles*, Ingineria Automobilului, vol. 6, no. 1, 11-13, 2012;

[4] http://www.toyota-global.com/innovation/environmental_technology/hybrid/;

[5] Varga, B.O.; Iclodean, C.; Mariasiu, F., *Electric and hybrid buses for urban transport*. Springer International Publishing, Switzerland, 2016;

[6] Ehsani, M.; Gao, Y.; Gay, S.E., *Modern Electric, Hybrid Electric, and Fuel Cell Vehicles, Fundamentals, Theory, and Design*. CRC Press, 2010;

[7] Dogariu, D.M.; Chiru, A.; Leahu, C.I.; Lazar, M., *Experimental Research on the Hybridization of a Road Vehicle*. Romanian Journal of Automotive Engineering – RoJAE, vol. 21, no.1, 15-20, 2015;

[8] Basshuysen, R.; Schäfer, F., *Internal combustion engine handbook: basics, components, systems, and perspectives*. SAE International, Warrendale, 2002.

ALGORITHM AND NUMERICAL CALCULATION OF UNDETERMINED STATIC REACTIONS TO THE PLAN ARTICULATED QUADRILATERAL MECHANISM WITH STRAIGHT BARS

ALGORITM ŞI CALCUL NUMERIC AL REACŢIUNILOR STATIC NEDETERMINATE ALE UNUI MECANISM PĂTRULATER PLAN ARTICULAT CU BARE DREPTE

REZUMAT

Această lucrare prezintă calculul numeric al reacțiunilor static nedeterminate ale unui mecanism patrulater plan cu bare drepte și cuple de rotație cinematică. Algoritmul utilizat a fost obținut utilizând metoda de deplasare relativă și a fost prezentat într-o lucrare anterioară. Metoda folosește calculul elastic liniar pentru a determina reacțiunile statice nedeterminate. Pentru plicația numerică a fost utilizat un program de calcul, software-ul Matlab, cu care s-au obținut diagramele de variație pentru reacțiunile statice determinate, precum și variațiile unghiurilor mici de rotație în cuplele cinematice. Mecanismul patrulater este destul de folosit, rezultatele obținute în această lucrare vor fi utile cercetătorilor din domeniu, iar proiectanții vor dimensiona mai eficient componentele unui astfel de mecanism. Metoda poate fi utilă în proiectare, dar și în calculele de verificare ale mecanismelor autovehiculelor existente.

Key-Words: *numerical calculus, undetermined static reactions, quadrilateral mechanism, straight bars*

Conf. dr. ing.
Jan-Cristian GRIGORE
jan_grigore@yahoo.com

Prof. dr. ing.
Nicolae PANDREA

Universitatea din Pitești, Str. Târgu din Vale, Nr. 1, 110032, Pitești, Romania

1. INTRODUCTION

In the previous work [4] a method for the calculation of undetermined static reactions was developed for the planar straight quadrilateral mechanism and kinematic rotation couplers. In the present paper, starting from the obtained analytical results, the algorithm and the calculation program for a numerical application will be elaborated.

2. THEORETICAL ASPECTS. REMARKS

The articulated quadrilateral mechanism is considered *ABCD* from figure. 1, formed by the straight bars *AB, BC, CD* indexed by numbers 1, 2, 3 and positioned through the angles φ_1, φ_2, φ_3 compared to the fixed reference system *AXY* and notations:

- R_{AX}, R_{AY} - forces of reaction, statically determined from the joint *A*;

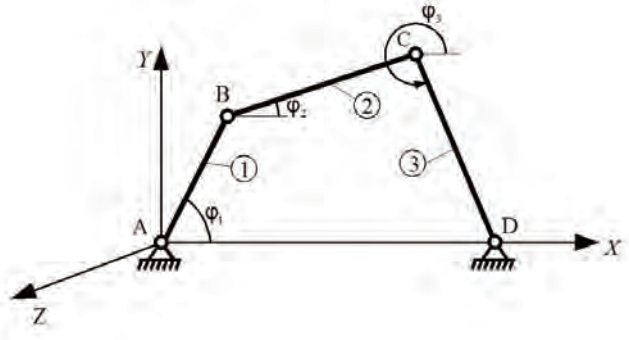

Fig. 1. The articulated quadrilateral mechanism

- M_{AZ}- momentum, statically determined from the joint *A*, moment that maintains equilibrium;
- R_{AZ} - reaction force, statically indeterminate from the joint *A*;
- M_{AX}, M_{AY} - moments of reaction, statically undetermined from the joint *A*;
- $\{R_A\}$ - column matrix of plűckeriene coordinates of the torsors reaction from *A*;
- $\{P_B, P_C, P_D\}$ - column matrices of plűckeriene coordinates torso's external forces acting in *B, C, D*;
- $\{U_B, U_C, U_D\}$ - column matrices [6], [8], attached to kinematic joints

$$\{U_B\}=[0\ \ 0\ \ 1\ \ Y_B\ \ -Y_C\ \ 0]^T;$$
$$\{U_C\}=[0\ \ 0\ \ 1\ \ Y_C\ \ -Y_C\ \ 0]^T;$$
$$\{U_{..}\}=[0\ \ 0\ \ 1\ \ Y_{..}\ \ -Y_{..}\ \ 0]^T$$

- $\{\tilde{U}_B\}$, $\{\tilde{U}_C\}$, $\{\tilde{U}_D\}$ - column matrices given by relationships:

$$\{\tilde{U}_B\}=[Y_B\ \ -X_B\ \ 0\ \ 0\ \ 0\ \ 1]^T;$$
$$\{\tilde{U}_C\}=[Y_C\ \ -X_C\ \ 0\ \ 0\ \ 0\ \ 1]^T;$$
$$\{\tilde{U}_D\}=[Y_D\ \ -X_C\ \ 0\ \ 0\ \ 0\ \ 1]^T$$

- $[H_{AB}]$, $[H_{BC}]$, $[H_{CD}]$ - the flexibility matrices of the bars *AB, BC, CD*;
- $[H_{AD}]$ - the matrix given by relationship:
  $[H_{AD}] = [H_{AB}] + [H_{BC}] + [H_{CD}]$
- $[K_{AD}]$ - the stiffness matrix defined by the relationships

$$[K_{AD}]=[H_{AD}]^{-1}=\begin{bmatrix} 0 & 0 & K_{13} & K_{14} & K_{15} & 0 \\ 0 & 0 & K_{23} & K_{24} & K_{25} & 0 \\ K_{31} & K_{32} & 0 & 0 & 0 & K_{36} \\ K_{41} & K_{42} & 0 & 0 & 0 & K_{46} \\ K_{51} & K_{52} & 0 & 0 & 0 & K_{56} \\ 0 & 0 & K_{63} & K_{64} & K_{65} & 0 \end{bmatrix}$$

- $[K^1_{AD}]$, $[K^2_{AD}]$- matrices given by equality:

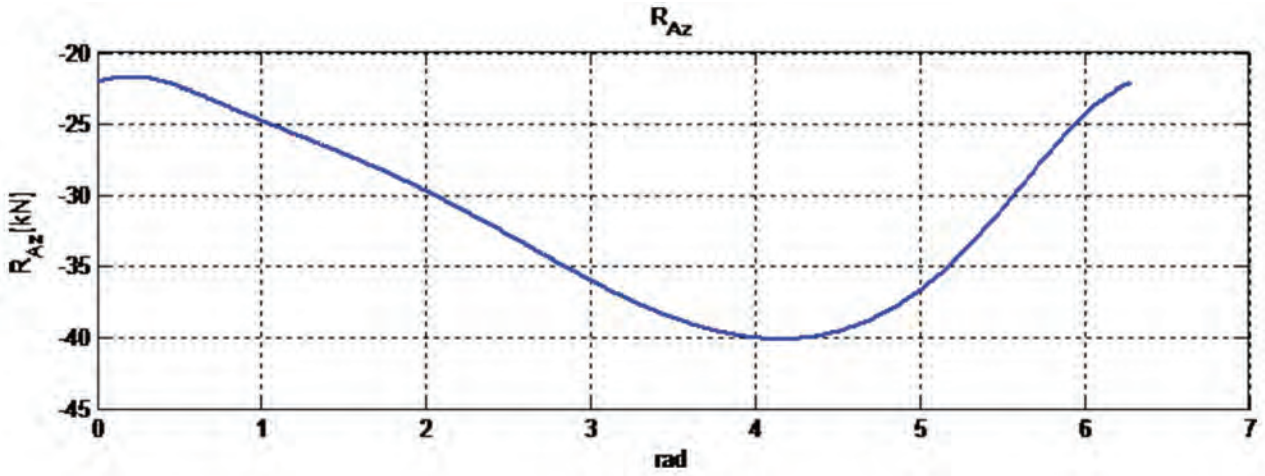

Fig. 2. The statically undetermined reactions R_{AZ} vs. φ_1

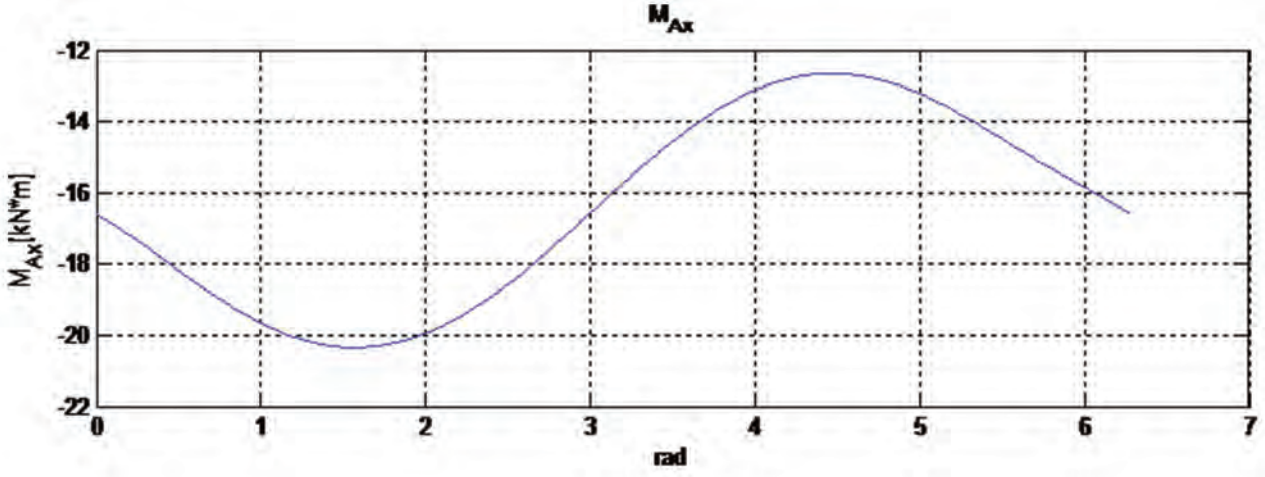

Fig. 3. The statically undetermined reactions M_{AX} vs. φ_1

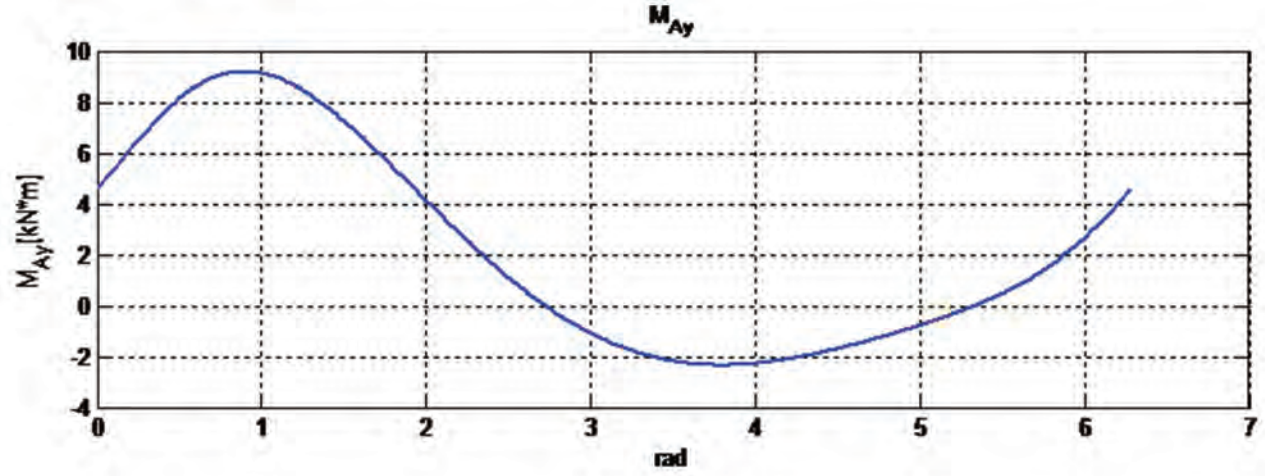

Fig. 4. The statically undetermined reactions M_{AY} vs. φ_1

$$\left[K_{AD}^{1}\right]=\begin{bmatrix}K_{13} & K_{14} & K_{15}\\ K_{23} & K_{24} & K_{25}\\ K_{33} & K_{34} & K_{35}\end{bmatrix},\left[K_{AD}^{2}\right]=\begin{bmatrix}K_{31} & K_{32} & K_{36}\\ K_{41} & K_{42} & K_{46}\\ K_{51} & K_{52} & K_{56}\end{bmatrix}$$

- $\{P_T\}$ - matrix column

$$\{P_T\}=-\begin{bmatrix}\{\widetilde{U}_B\}^T\cdot\{P_B\}\\ \{\widetilde{U}_C\}^T\cdot\{\{P_B\}+\{P_C\}\}\\ \{\widetilde{U}_D\}^T\cdot\{\{P_B\}+\{P_C\}+\{P_D\}\}\end{bmatrix}$$

- $\{\widetilde{\Delta}\}$ - matrix column

$$\{\widetilde{\Delta}\}=[H_{BC}]\{P_B\}+[H_{CD}]\{\{P_B\}+\{P_C\}\}=\begin{bmatrix}\widetilde{\theta}_x & \widetilde{\theta}_y & \widetilde{\theta}_z & \widetilde{\Delta}_x & \widetilde{\Delta}_y & \widetilde{\Delta}_z\end{bmatrix}$$

- $[A]$, $[B]$ - matrices

$$[A]=\begin{bmatrix} Y_B & -X_B & 1 \\ Y_C & -X_C & 1 \\ Y_D & -X_D & 1 \end{bmatrix};[B]=\begin{bmatrix} 1 & 1 & 1 \\ Y_B & Y_C & Y_D \\ -X_B & -X_C & -X_D \end{bmatrix}$$

- ζ_B, ζ_C, ζ_D - small angles of rotation in kinematic joins;
- $\{\zeta\}$ - matrix column.

$\{\zeta\} = \{\zeta_B\ \zeta_C\ \zeta_D\}^T$

With these notations [5], deduct the determined static reactions

$$\begin{bmatrix} R_{AX} \\ R_{AY} \\ M_{AZ} \end{bmatrix} = [A]^{-1}\{P_T\}$$

statically undetermined reactions

$$\begin{bmatrix} R_{AZ} \\ M_{AX} \\ M_{AY} \end{bmatrix} = -[K^2_{AD}]\begin{bmatrix} \tilde{\theta}_x \\ \tilde{\theta}_y \\ \tilde{\Delta}_z \end{bmatrix}$$

and the angles of rotation in the kinematic joints

$$\begin{bmatrix} \zeta_B \\ \zeta_C \\ \zeta_D \end{bmatrix} = [B]^{-1}[K^1_{AD}]^{-1}[A]^{-1}\{P_T\}+[B]^{-1}\begin{bmatrix} \tilde{\theta}_z \\ \tilde{\theta}_x \\ \tilde{\Delta}_y \end{bmatrix}$$

3. CALCULATION ALGORITHM

It is considered as for bars indexed with 1, 2, 3 the lengths are known l_i, areas A_i, of the normal sections, geometrical moments of inertia I_{yi}, I_{zi}, $I_{xi}(I_{xi} = I_{yi} + I_{zi})$, elasticity modules E_i, G_i the flexibility matrices [7],

$$[h_i]=\begin{bmatrix} 0 & 0 & 0 & \frac{l_i}{GI_{xi}} & 0 & 0 \\ 0 & 0 & \frac{l_i^2}{2E_iI_{yi}} & 0 & \frac{l_i}{E_iI_{yi}} & 0 \\ 0 & -\frac{l_i^2}{2EI_{zi}} & 0 & 0 & 0 & \frac{l_i}{E_iI_{zi}} \\ \frac{l_i}{EA_i} & 0 & 0 & 0 & 0 & 0 \\ 0 & \frac{l_i^2}{3E_iI_{xi}} & 0 & 0 & 0 & -\frac{l_i^2}{2E_iI_{xi}} \\ 0 & 0 & \frac{l_i^2}{3EI_{yi}} & 0 & \frac{l_i^2}{2E_iI_{yi}} & 0 \end{bmatrix}$$

$i = 1,2,3$ and distance $AD = X_D$

Calculates for angle values φ_1 ranging from grade to grade:

a) the angles φ_3, φ_2 with relationships

$$A = 2l_3(X_D - l_1\cos\varphi_1); B = 2l_1l_3\sin\varphi_1; C = l_2^2 - X_D^2 - l_1^2 - l_3^2 + 2X_Dl_1\cos\varphi_1$$

$$\varphi_3 = 2\pi + 2arctg\frac{B+\sqrt{A^2+B^2-C^2}}{C-A}; \varphi_2 = \arcsin\frac{l_3\sin\varphi_3 - l_1\sin\varphi_1}{l_2}$$

b) the coordinates of the points *B,C,D*;

$$X_B = l_1\cos\varphi_1; Y_B = l_1\sin\varphi_1; X_C = X_B + l_2\cos\varphi_2; Y_C = Y_B + l_2\sin\varphi_2; Y_D = 0$$

c) translation matrices;

$$[G_1]=[0];[G_2]=\begin{bmatrix} 0 & 0 & Y_B \\ 0 & 0 & -X_B \\ -Y_B & X_B & 0 \end{bmatrix};[G_3]=\begin{bmatrix} 0 & 0 & Y_C \\ 0 & 0 & -X_C \\ -Y_C & X_C & 0 \end{bmatrix}$$

d) rotation matrices;

$$[R_i]=\begin{bmatrix} \cos\varphi_i & -\sin\varphi_i & 0 \\ \sin\varphi_i & \cos\varphi_i & 0 \\ 0 & 0 & 1 \end{bmatrix}; i = 1,2,3$$

e) position matrices;

$$[T_i]=\begin{bmatrix} [R_i] & [0] \\ [G_i][R_i] & [R_i] \end{bmatrix};[T_i]^{-1}=\begin{bmatrix} [R_i]^T & [0] \\ [R_i]^T[G_i]^T & [R_i]^T \end{bmatrix}; i = 1,2,3$$

f) the flexibility matrices;

$$[H_i]=[T_i][k_i][T_i]^{-1};[H_{AB}]=[H_1];[H_{BC}]=[H_2];[H_{CD}]=[H_3]$$

g) the total flexibility matrix

$$[H_{AD}]=[H_{AB}]+[H_{BC}]+[H_{CD}]$$

h) matrices $[K_{AD}]$, $[K^1_{AD}]$, $[K^2_{AD}]$ with relationships (3), (4), (5);

i) column matrices $[P_T]$, $[\tilde{\Delta}]$ with relationships (6), (7);

j) the matrices [A], [B] with relationships(8);

k) static reactions determined by the relationship (10);

l) static reactions not determined with the relationship(11);

m) the rotation of the kinematic couple with the relationship(12).

4. NUMERICAL APPLICATION

It determines statically the reactions, determined and indetermined and then the angular rotation of the couplings for the mechanism of Figure 1, knowing that the element 3 is actuated in *D* in the direction of the axis *AZ*, for a moment $\tilde{M}$ and knowing it as punctual *C* acting force *P* in the direction of the axis *AZ*. It is considered that the bars have equal, circular cross sections of diameter *d*.

Numerical data:

$$l_1 = l = 0.2m; l_2 = l_3 = 3*l; X_D = 3*l; d = 0.01m; E_1 = E = 2.1\cdot10^{11}N\cdot m^{-2}; G_1 = G = 0.8\cdot10^{11}N\cdot m^{-2};$$

$$I_{x1} = I_{x1} = \frac{\pi d^4}{64}; I_{x1} = \frac{\pi d^4}{32}; \{P_B\} = \{0\ 0\ P\ PY_C\ -PX_C\ 0\}^T; \{P_D\} = \{0\ 0\ 0\ 0\ 0\ \tilde{M}\}^T;$$

$$P = 100N; \tilde{M} = 20N\cdot m$$

In the numerical case the calculation program is elaborated using the Matlab code, on the basis of which are represented the following diagrams

5. CONCLUSION

Under these conditions, based on the calculations described in the paper, a computational program was drawn using the Matlab code, and the results obtained for the undetermined static reactions are transcribed in the diagrams of Fig. 2-4. In the absence of motion-compatible external forces (forces in the plane of motion and moment perpendicular to the plane of motion), the components R_{AX}, R_{AY}, M_{AZ} compatible with the movement of the reaction from A are null. The obtained variation diagrams represent periodical variations. For R_{AZ} the extreme, minimum and maximum values are between; -40.0089, -21.6020. For component M_{AX}, values are between -20.3390 and -12.6537 and for M_{AY} between -2.2803 and 9.2389. Static undetermined reaction values are significant and can influence the movement of the mechanism. The minimum reaction moment, M_{AX}, in the absolute value, is greater than the momentum of the drive.

Lucrare prezentată în cadrul Congresului Internațional de Inginerie a Autovehiculelor și Transporturilor - CAR 2017, 08.11 – 10.11.2017, Pitești, România, și publicată în nr. 28 al Buletinului Științific – Seria Autovehicule Rutiere al Universității din Pitești (ISSN 1453-1100).

REFERENCES:

[1] Buculei, M., Băgnaru, D., Nanu, Gh., Marghitu, D., Computational methods to analyze mechanisms with bars, Romanian Writing Publishing, Craiova, (1994);

[2] Bulac, I, Grigore, J.-C., Mathematical model for calculation of liniar elastic shaft, annals of the Oradea University, vol XI, nr. 2, (2012);

[3] Corbon, J., Calcul des structures, Dunod, Paris, (1972);

[4] Grigore, J.,Cr., Pandrea, N., Calculation of the undetermined static reactions for the articulated plan quadrilateral mechanism (ISSN 0976 – 6340 (Print), ISSN 0976 – 6359 (Online), Volume 4, Issue 3, May - June (2013), pp. 400-408, © IAEME), (2013);

[5] Pandrea, N., The method of relative displacements in the calculation of elastic systems, Bulletin of the Institute of Higher Education, Pitești, (1978);

[6] Pandrea, N., Elements of solid mechanics coordinate plückeriene, Romanian Academy Publishing, Bucharest, (2000);

[7] Popa, D., Contributions to the study of dynamic elastic-bar mechanisms. Thesis, Polytechnic Institute Bucharest(1997);

[8] Voinea, R., Pandrea, N., Contributions to a general mathematical theory of kinematic couplings, SYROM, vol. B, Bucharest (1973).

POLITEHNICA UNIVERSITY OF TIMIŞOARA – STUDENTS ACHIEVEMENTS

ACTIVITĂȚI STUDENȚEȘTI LA UNIVERSITATEA POLITEHNICA DIN TIMIȘOARA

La începutul anului universitar 2017-2018 echipa UPT Racing Team și-a reînceput activitatea printr-un proiect nou, revenind cu forțe proaspete și cu dorința de a construi o o mașină nouă - denumită TSR2.

Având la bază experiența acumulată prin realizarea TSR 1, membrii echipei au venit cu idei noi pentru a îmbunătăți noul vehicul din programul Formula Student.

Noul proiect studențesc UPT Racing Team a început cu stabilirea noilor obiective și a sarcinilor ce urmau a fi îndeplinite de către membrii echipei. Pentru început, membrii echipei au susținut prezentări în cadrul Facultății de Mecanică și la Biblioteca Universității Politehnica Timișoara cu scopul de a informa studenții și cadrele didactice în legătură cu importanta și utilitatea participării la un astfel de proiect.

În luna octombrie 2017 s-a definitivat componența UPT Racing Team prin includerea unui număr de 20 persoane dintre cele 77 intervievate, având în vedere și competențele necesare echipei (tehnice etc.).

Un prim obiectiv stabilit pentru membrii UPT Racing Team a fost parcurgerea cursurilor CAD necesare pentru aprofundarea cunoștințelor specifice și punerea în practică/realizarea unor elemente ale autovehiculului TRS 2 - cu ajutorul oferit de către membrii cu experiență ai echipei. Astfel, în paralel cu aceste cursuri, s-a realizat proiectarea efectivă a șasiului și a celorlalte componente.

În luna ianuarie 2018 echipa s-a înscris la cele două competiții - obiective majore ale proiectului: Formula Student Netherlands și Formula Student Italy. Totodată a demarat lucrul practic la șasiu.

În perioada urmatoare membrii echipei au parcurs cursuri soft skills (public speaking, spre exemplu) și au îndeplinit, pe grupuri specializate, sarcini de Cost Event, Design Event si Business Presentation Plan.

Grupul Cost Event a determinat costurile de realizare a mașinii, stabilind costul pentru fiecare componentă indiferent dacă era achiziționată sau realizată în atelierele proprii, luându-se în considerare toate procesele cuprinzatoare.

În cadrul Desing Event membrii echipei au comparat caracteristicile șasiurilor monoposturilor TSR1 și TSR2, remarcând evoluția înregistrată.

In cadrul Business Presentation Plan s-au studiat bazele unei posibile firme producătoare de automobile Formula Student. S-au realizat documentația și pregătirea unei prezentări cu scopul atragerii investitorilor. S-au identificat piețe țintă și potențiali consumatori. S-au stabilit caracteristicile financiare și investițiile necesare realizării proiectului.

În luna aprilie a avut loc finalizarea șasiului (suport de aluminiu) și montarea motorului.

Folosind dotările din atelierul Facultatii de Mecanică s-au realizat sistemul de evacuare al motorului, rezervorul, galeria de admisie, caroseria (folosind fibră de carbon și fibră de sticlă) și alte componente necesare.

În cadrul sistemul electric s-a folosit, pentru prima dată, Microsquirt-ul pentru managementul electronic al motorului. Volanul, cu caracteristici mai avansate decat cel utilizat la TSR1, are afișaj LCD pentru viteze și status electronic. Finalizarea monpostului a cuprins montarea coloanei de direcție, suspensiei, roților, diferențialului, planetarelor, fuzetelor, discurilor de frână, etrierilor, ansamblului pedalier.

În luna iulie 2018 UPT Racing Team a participat la competițiile Formula Student Netherlands și Formula Student Italy. De fiecare dată au fost prezentate elementele componente Bussines Plan, Cost Event și Design Event (activități statice).

Monopostul TSR 2 a participat la inspecția tehnică unde echipa a primit sugestii tehnice pentru a obține o variantă mai bună a mașinii, membrii juriului fiind încântați de munca și efortul depus de UPT Racing Team.

În ambele competiții studenții români au avut ocazia să cunoască studenți care au reprezentat echipe ale unor universități din Germania, India, Italia, Elvetia, inclusiv o altă echipă din România - de la Universitatea Tehnică „Gheorghe Asachi" din Iași.

UPT Racing Team a primit un premiu de participare la FS Italy și s-a întors în țară cu obiective noi, determinată să muncească și cu mai mult spor pentru sezonul următor.

Conf. dr. ing. Liviu-Nicolae MIHON

RoJAE
Romanian Journal of Automotive Engineering

ISSN 2457 – 5275 (Online, English)
ISSN 1842 – 4074 (Print, Online, Romanian)

The Scientific Journal of SIAR
A Short History

The engineering of vehicles represents the engine of the global development of the economy.
SIAR tracks the progress of the automotive engineering in Romania by: the development of automotive engineering, the development of technologies, and road transport services; supporting the work of the haulers, supporting the technical inspection and of the garage; encouraging young people to have a career in the automotive engineering and road haulage; stimulation and coordination of activities that promote an environment that is suitable for continuous education and improving of knowledge of the engineers; active exchange of ideas and experience, in particular for students, master students, PhD students, and young engineers, and dissemination of knowledge in the field of automotive engineering; cooperation with other technical and scientific organizations, employers' and socio-professional associations through organization of joint actions, of mutual interest.
By the accession to FISITA (International Federation of Automotive Engineering Societies) since its establishment, SIAR has been involved in achieving an overall professional community that is homogeneous in competence and performance, interactive, dynamic, and competitive at the same time, oriented towards a balanced and friendly relationship between people and the environment; this action will be constituted as a challenge worthy of effort and recognition.
The insurance of a favorable framework for the initiation and the development of cooperation of the specialists in this field of activity allows for an efficient and easy exchange of information, specific knowledge and experience; it supports the cooperation between universities and between research centers and industry; it speeds up the process of implementing the new technologies, it simplifies the identification of training and specialization needs of the personnel involved in the engineering of motor vehicles, transport, and road safety.
In order to succeed, ever since its founding, SIAR has considered that the stress should be put on the production and distribution, at national and international level, of a publication of scientific quality.

Under these circumstances, the development of the scientific magazine of SIAR had the following evolution:

1. RIA – Revista inginerilor de automobile (in English: ***Journal of Automotive Engineers***)
ISSN 1222 – 5142
Period of publication: 1990 – 2000 — Format: print, Romanian
Frequency: Quarterly — Electronic publication on: www.ro-jae.ro
Total number of issues: 30 — Type: Open Access
The above constitutes series nr. 1 of SIAR scientific magazine.

2. Ingineria automobilului (in English: ***Automotive Engineering***)
ISSN 1842 – 4074
Period of publication: as of 2006 — Format: print and online, Romanian
Frequency: Quarterly — Electronic publication on: www.ingineria-automobilului.ro
Total number of issues: 50 — Type: Open Access
(including the March 2019 issue)
The above constitutes series nr. 2 of SIAR scientific magazine (Romanian version).

3. Ingineria automobilului (in English: ***Automotive Engineering***)
ISSN 2284 – 5690
Period of publication: 2011 – 2014 — Format: online, English
Frequency: Quarterly — Electronic publication on: www.ingineria-automobilului.ro
Total number of issues: 16 — Type: Open Access
(including the December 2014 issue)
The above constitutes series nr. 3 of SIAR scientific magazine (English version).

4. *Romanian Journal of Automotive Engineering*
ISSN 2457 – 5275
Period of publication: from 2015 — Format: online, English
Frequency: Quarterly — Electronic publication on: www.ro-jae.ro
Total number of issues: 17 (March 2019) — Type: Open Access
The above constitutes series nr. 4 of SIAR scientific magazine (English version).

Summary – on March 31, 2019

Total of series:	*4*
Total years of publication:	*25 (11=1990 – 2000; 14=2006-2019)*
Publication frequency:	*Quarterly*
Total issues published:	*80 (Romanian), out of which, the last 33 were also published in English*

REGISTRUL AUTO ROMÂN

www.rarom.ro

PROGRAMĂRI
021/9672

www.autotestmagazin.ro
www.facebook.com/RegistrulAuto
www.facebook.com/autotestmagazin